

# Pattern Digest

2006 Version

PSR    WINTER    VAN    4X4

# ***Preface***

**T**his manual has been prepared to help you obtain the maximum safety and value from Bridgestone tyres. It provides useful definitions, advice on proper selection and care, and lists the detailed specifications of a wide range of patterns and sizes. We hope that you will get the very most out of our high quality products.

All theoretical data contained in this Pattern Digest refer to ETRTO standards.

© 2006 Bridgestone Europe NV/SA  
Kleine Kloosterstraat10  
1932 Sint Stevens Woluwe (Zaventem), Belgium

**Notice :** Although great care has been taken in producing this manual, we can accept no responsibility for any loss or damage resulting from undetected errors or misprints which may have occurred.


Due to constant advance of tyre technology, contents of this data book are subject to change without notice.

# Contents


<b>General Information</b> .....	page 4
1. Construction Diagram .....	page 4
2. Tyre Dimensions .....	page 4
3. Tyre Size Designations.....	page 4
4. Load Index.....	page 5
5. Speed Symbol.....	page 6
6. Speed Category .....	page 6
7. Inflation Pressure.....	page 6
8. Tyre Rotation.....	page 6
9. Run Flat Tyre .....	page 6
10. Passenger Car Tyre Conversion Chart .....	page 7
11. Rims Conversion Chart (ETRTO 2004).....	page 11
<b>Technology Guide</b> .....	page 16
<b>Tyre Size Chart</b> .....	page 19
<b>Passenger Summer / Replacement / OE</b> .....	page 27
<b>Passenger Summer / Replacement</b> .....	page 39
<b>Passenger Summer / Original Equipment (OE)</b> .....	page 43
<b>Passenger Winter / PXR</b> .....	page 67
<b>4x4 Specific Information</b> .....	page 79
<b>4x4 Summer / Replacement / (OE)</b> .....	page 83
<b>4x4 Summer / Replacement</b> .....	page 91
<b>4x4 Summer / Original Equipment (OE)</b> .....	page 97
<b>4x4 Winter</b> .....	page 103
<b>Van Summer</b> .....	page 107
<b>Van Winter</b> .....	page 115
<b>Bridgestone Index</b> .....	page 120
<b>Bridgestone Addresses</b> .....	page 122

# General Information


## 1. Construction Diagram

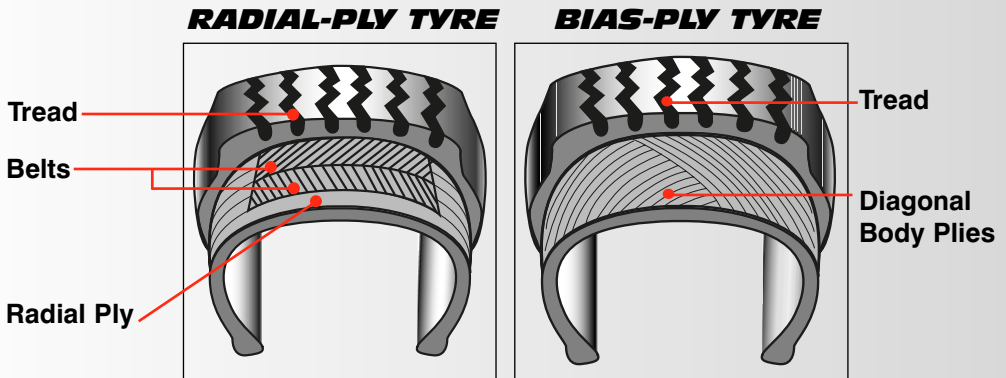

## 2. Tyre Dimensions

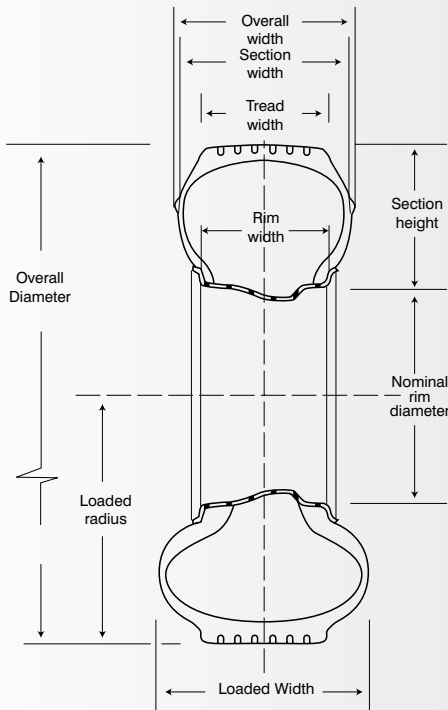

## 3. Tyre Size Designations

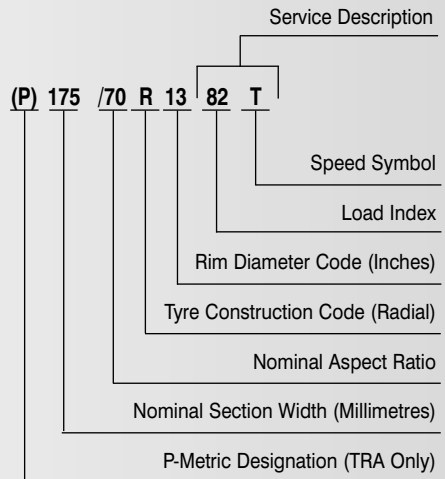

### Other Forms

#### (P) 185/70 SR 14 86 S

\* Includes the speed rating after the aspect ratio and in the service description.

#### (P) 195/50 ZR 15

\* Includes the speed rating after the aspect ratio and no service description.

#### 185R14C 106/104

C = Commercial, "106/104" load index "single/dual" use.

# General Information

## 4. Load Index

The LOAD INDEX is a numerical code associated with the maximum load a tyre can carry at the speed indicated by its Speed Symbol under specified service conditions specified by the tyre manufacturer up to and including 210 km/h. For speeds in excess of 210 km/h, actual load on the tyre should be reduced according to table "Percentage of Load capacity (%) vs. Speed".

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	24	90	48	180	72	355	96	710	120	1,400
1	46.2	25	92.5	49	185	73	365	97	730	121	1,450
2	47.5	26	95	50	190	74	375	98	750	122	1,500
3	48.7	27	97.5	51	195	75	387	99	775	123	1,550
4	50	28	100	52	200	76	400	100	800	124	1,600
5	51.5	29	103	53	206	77	412	101	825	125	1,650
6	53	30	106	54	212	78	425	102	850	126	1,700
7	54.5	31	109	55	218	79	437	103	875	127	1,750
8	56	32	112	56	224	80	450	104	900	128	1,800
9	58	33	115	57	230	81	462	105	925	129	1,850
10	60	34	118	58	236	82	475	106	950	130	1,900
11	61.5	35	121	59	243	83	487	107	975	131	1,950
12	63	36	125	60	250	84	500	108	1,000	132	2,000
13	65	37	128	61	257	85	515	109	1,030	133	2,060
14	67	38	132	62	265	86	530	110	1,060	134	2,120
15	69	39	136	63	272	87	545	111	1,090	135	2,180
16	71	40	140	64	280	88	560	112	1,120	136	2,240
17	73	41	145	65	290	89	580	113	1,150	137	2,300
18	75	42	150	66	300	90	600	114	1,180	138	2,360
19	77.5	43	155	67	307	91	615	115	1,215	139	2,430
20	80	44	160	68	315	92	630	116	1,250	140	2,500
21	82.5	45	165	69	325	93	650	117	1,285		
22	85	46	170	70	335	94	670	118	1,320		
23	87.5	47	175	71	345	95	690	119	1,360		

Percentage of Load Capacity (%) versus Speed <sup>(1)</sup>				
Speed Capability of the vehicle (km/h)	Speed Symbol			
	H	V	W	Y
	%	%	%	%
210	100	100	100	100
220	—	97	100	100
230	—	94	100	100
240	—	91	100	100
250	—	—	95	100
260	—	—	90	100
270	—	—	85	100
280	—	—	—	95
290	—	—	—	90
300 <sup>(2)</sup>	—	—	—	85

(1) For intermediate maximum speeds, linear interpolation of the tyre load capacity is permitted.

(2) For speed capabilities over 300 km/h, the percentage of the load capacities and the relevant inflation pressures will be agreed between vehicle and tyre manufacturers (or their national associations) taking into consideration the vehicle characteristics and the type of service.

**Notes :** The above load and pressure information is provided for general reference only. In practice, the vehicle manufacturers recommended tyre pressures should be followed.

# General Information

## 5. Speed Symbol

The SPEED SYMBOL indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index under service conditions specified by the tyre manufacturer.

Speed Symbol	Speed (km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300

## 6. Speed Category

The SPEED CATEGORY markings shown below indicate tyre speed capabilities above 240 km/h and are included within the tyre size designation e.g. 215/50 ZR 15. Generally, Service Description is not shown on such tyres. For actual speed capabilities and load capacities, consult the tyre manufacturer concerned.

SPEED CATEGORY MARKINGS		TYRE SPEED CAPABILITY (km/h)
Radial	Bias-Belted	
ZR	ZB	over 240

## 7. Inflation Pressure

Car manufacturer's tyre pressure recommendations should always be followed and can be found in the car manual.

Most tyre trouble is caused by incorrect tyre pressure.

This seriously affects driving performance and tyre life.

a. Measure and adjust pressure when the tyre is cool.


b. For continuous high-speed highway driving, increase tyre pressure by 0.2 to 0.3 bar (3 to 5 psi).

## 8. Tyre Rotation

Periodical rotation will increase the life of your tyres.

Please follow the below shown diagram & maintain direction of travel.

Preferably new tyres should be introduced on the rear (including spare).



## 9. Run Flat Tyre **RFT**

Today's car manufacturers are introducing more and more vehicles which are equipped with RFT tyres.

The RFT tyres are capable of continuing to support the vehicles weight even at zero pressure.

This enables the customer, in the case of a total air loss, to drive at reduced speed to the next service station. The driver no longer has to stop at dangerous areas (Autobahn / Bridges / Tunnels, etc.) to jack up the vehicle and change the flat tyre.

As the driver might not recognize that one tyre is operating at zero pressure, **a pressure monitor system has to be installed** warning the driver immediately if an air loss occurs.

The sensors of such warning systems are mostly mounted inside the wheel. Therefore extra care has to be applied during dismounting and mounting of tyre.

Check with the vehicles owner / car manufacturers manual and investigate which kind of sensors are used to prevent any possible damage during handling.

Also, as RFT (Self Supporting) tyres sidewall stiffness is approximately six times thicker than a standard tyre, advanced tyre changing equipment should be used.

As a reference, machinery which is able to handle 45 series (and lower) aspect ratio tyres.

For Bridgestone RFT's there is no special accessory needed.

Generally: Non trained and inexperienced people should not mount tyres.

Bridgestone RFT tyres can be recognized by the above logo applied on the tyres sidewall.

# General Information

ETRTO theoretical standards

Please contact your vehicle manufacturer or dealer if you have any questions or queries.

## 10. Conversion Chart

Conversion sizes are those with similar overall diameter (OD) ± 6mm and same or greater load index (LI).

Actual Size	Conversion Size	
	LI	OD
135R12	65	522
145R12	72	542
155R12	76	550
175R13	86	608
155R14	80	604
165R14	84	622
165R15	86	646
135/80R13	70	546

Conversion Size	Actual Size	
	LI	OD
145/65R13	69	518
165/70R12	77	537
155/70R13	75	548
165/65R13	77	544
175/60R13	77	540
165/65R13	77	544
185/60R13	80	552
195/65R14	89	610
205/60R14	88	602
205/55R15	88	607
225/50R15	91	607
205/50R16	87	612
225/45R16	89	608
245/35R17	87	604
175/70R14	84	602
195/65R14	89	610
205/60R14	88	602
205/55R15	88	607
225/50R15	91	607
195/50R16	84	602
225/45R16	89	608
215/40R17	83	604
245/35R17	87	604
185/70R14	88	616
185/65R15	88	621
205/60R15	91	627
215/50R16	90	622
245/45R16	94	626
215/45R17	87	626
235/40R17	90	620
245/40R17	91	628
275/35R17	94	624
205/65R15	94	647
225/60R15	96	650
215/55R16	93	642
235/50R16	95	642
215/50R17	91	648
235/45R17	93	644
245/45R17	95	652
265/40R17	96	644
275/40R17	98	652
235/40R18	91	645
265/35R18	93	643
275/35R18	95	649
265/30R19	89	643
155/70R13	75	548
165/65R13	77	544
175/60R13	77	540
185/60R13	80	552

Actual Size	Conversion Size	
	LI	OD
145/80R13	75	562
155/80R13	79	578
165/80R13	83	594
175/80R14	88	636
185/80R14	91	652

Conversion Size	Actual Size	
	LI	OD
165/70R13	79	562
175/65R13	80	558
155/65R14	75	558
175/60R14	79	566
185/55R14	80	560
195/45R15	78	557
175/70R13	82	576
175/65R14	82	584
185/60R14	82	578
195/50R15	82	577
215/45R15	84	575
215/40R16	82	578
185/70R13	86	590
185/65R14	86	596
195/60R14	86	590
195/55R15	85	595
215/50R15	88	597
205/45R16	83	590
195/70R14	91	630
195/65R15	91	635
215/60R15	94	639
205/55R16	91	632
215/55R16	93	642
225/50R16	92	632
235/50R16	95	642
205/50R17	89	638
225/45R17	90	634
255/40R17	94	636
225/40R18	88	637
255/35R18	90	635
205/65R15	94	647
225/60R15	96	650
205/60R16	92	653
225/55R16	95	654
215/50R17	91	648
245/45R17	95	652
275/40R17	98	652
245/40R18	93	653
275/35R18	95	649
285/35R18	97	657

### NOTES :

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

# General Information

Actual Size	Conversion Size				
	LI	OD			
145/70R12	69	509			
165/70R12	77	537			
145/70R13	71	534			
155/70R13	75	548			
			175/50R13	72	506
			175/60R13	77	540
165/70R13	79	562			
			155/65R13	73	532
			175/60R13	77	540
			165/65R13	77	544
175/70R13	82	576			
			185/60R13	80	552
			165/60R14	75	554
			175/65R13	80	558
			175/60R14	79	566
185/70R13	86	590			
			185/55R14	80	560
			185/60R14	82	578
			195/55R14	82	570
165/70R14	81	588			
			195/50R15	82	577
			205/45R15	84	575
			215/40R16	82	578
			185/65R14	86	596
			195/60R14	86	590
175/70R14	84	602			
			205/50R15	86	587
			175/65R14	82	584
			195/60R14	86	590
			185/55R15	82	585
			205/50R15	86	587
			205/45R16	83	590
			225/35R17	82	590
			185/65R14	86	596
			205/60R14	88	602
185/70R14	88	616			
			205/55R15	88	607
			215/50R15	88	597
			225/50R15	91	607
			195/50R16	84	602
			225/45R16	89	608
			245/35R17	87	604
			195/65R14	89	610
195/70R14	91	630			
			185/65R15	88	621
			195/60R15	88	615
			215/50R16	90	622
			235/40R17	90	620
			195/65R15	91	635
205/70R14	95	644			
			205/60R15	91	627
			205/55R16	91	632
			225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			255/40R17	94	636
			275/35R17	94	624
			285/30R18	93	629
			225/60R15	96	650
			235/50R16	95	642
			265/40R17	96	644
			275/35R18	95	649

Actual Size	Conversion Size				
	LI	OD			
165/65R13	77	544			
175/65R13	80	558			
155/65R14	75	558			
			175/60R13	77	540
			185/60R13	80	552
165/65R14	79	570			
			185/55R14	80	560
			165/60R14	75	554
			185/55R14	80	560
175/65R14	82	584			
			195/45R15	78	557
			175/60R14	79	566
			195/55R14	82	570
			215/45R15	84	575
185/65R14	86	596			
			215/40R16	82	578
			185/60R14	82	578
			195/60R14	86	590
			185/55R15	82	585
			205/50R15	86	587
195/65R14	89	610			
			205/45R16	83	590
			225/35R17	82	590
			195/60R14	86	590
185/65R15	88	621			
			205/60R14	88	602
			215/50R15	88	597
			225/50R15	91	607
			225/45R16	89	608
			195/60R15	88	615
195/65R15	91	635			
			205/60R15	88	615
			205/60R15	91	627
			215/50R16	90	622
			245/45R16	94	626
			235/40R17	90	620
			275/35R17	94	624
			215/60R15	94	639
205/65R15	94	647			
			205/55R16	91	632
			225/50R16	92	632
205/65R15	94	647			
			255/40R17	94	636
			285/30R18	93	629
			225/60R15	96	650
			235/50R16	95	642
215/65R15	96	661			
			245/45R17	95	652
			265/40R17	96	644
			275/40R17	98	652
			275/35R18	95	649
			255/50R16	99	662
			255/45R17	98	662
			285/40R17	100	660
335/35R17	97	666			
285/35R18	97	657			
295/35R18	99	663			



# General Information

Actual Size			Conversion Size		
	LI	OD		LI	OD
165/60R14	75	554	185/55R14	80	560
			195/45R15	78	557
175/60R14	79	566	185/55R14	80	560
			195/55R14	82	570
185/60R14	82	578	195/50R15	82	577
			215/45R15	84	575
			215/40R16	82	578
195/60R14	86	590	205/50R15	86	587
205/60R14	88	602	205/55R15	88	607
			215/50R15	88	597
			225/50R15	91	607
			225/45R16	89	608
195/60R15	88	615	235/40R17	90	620
205/60R15	91	627	205/55R16	91	632
			225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			275/35R17	94	624
			285/30R18	93	629
215/60R15	94	639	235/50R16	95	642
			255/40R17	94	636
			265/40R17	96	644
225/60R15	96	650	265/40R17	96	644
			275/40R17	98	652
			225/55R16	95	654
205/60R16	92	653	245/45R17	95	652
			275/40R17	98	652
			245/40R18	93	653
			275/35R18	95	649
			285/35R18	97	657
235/60R16	100	688	285/40R18	101	685

Actual Size			Conversion Size		
	LI	OD		LI	OD
195/55R14	82	570	215/45R15	84	575
185/55R15	82	585	205/50R15	86	587
			205/45R16	83	590
			225/35R17	82	590
195/55R15	85	595	215/50R15	88	597
205/55R15	88	607	225/50R15	91	607
			225/45R16	89	608
205/55R16	91	632	225/50R16	92	632
			245/45R16	94	626
			245/40R17	91	628
			255/40R17	94	636
			285/30R18	93	629
215/55R16	93	642	235/50R16	95	642
			235/45R17	93	644
			255/40R17	94	636
			265/40R17	96	644
			265/35R18	93	643
225/55R16	95	654	245/45R17	95	652
			275/40R17	98	652
			285/40R17	100	660
			275/35R18	95	649
225/55R17	97	680	285/35R18	97	657
			285/40R18	101	685
			285/35R19	99	683

**NOTES :**

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

# General Information

Actual Size			Conversion Size		
LI	OD		LI	OD	
195/50R15	82	577	215/45R15	84	575
			215/40R16	82	578
195/50R16	84	602	225/45R16	89	608
			245/35R17	87	604
205/50R16	87	612	225/45R16	89	608
215/50R16	90	622	245/45R16	94	626
			235/40R17	90	620
			245/40R17	91	628
			275/35R17	94	624
225/50R16	92	632	245/45R16	94	626
			255/40R17	94	636
			285/30R18	93	629
235/50R16	95	642	265/40R17	96	644
255/50R16	99	662	285/40R17	100	660
			295/35R18	99	663
205/50R17	89	638	225/45R17	90	634
			235/45R17	93	644
			255/40R17	94	636
			265/40R17	96	644
			255/35R18	90	635
			265/35R18	93	643
			265/30R19	89	643
215/50R17	91	648	235/45R17	93	644
			245/45R17	95	652
			265/40R17	96	644
			275/40R17	98	652
			235/40R18	91	645
			245/40R18	93	653
			265/35R18	93	643
			275/35R18	95	649

Actual Size			Conversion Size		
LI	OD		LI	OD	
245/45R16	94	626	275/35R17	94	624
215/45R17	87	626	235/40R17	90	620
			245/40R17	91	628
			275/35R17	94	624
			285/30R18	93	629
225/45R17	90	634	245/40R17	91	628
			255/40R17	94	636
			255/35R18	90	635
			285/30R18	93	629
235/45R17	93	644	265/40R17	96	644
			265/35R18	93	643
			275/35R18	95	649
245/45R17	95	652	275/40R17	98	652
			275/35R18	95	649
			285/35R18	97	657
255/45R17	98	662	285/40R17	100	660
			295/35R18	99	663
245/45R18	96	677	285/35R19	99	683
255/45R18	99	687	285/40R18	101	685
			285/35R19	99	683

Actual Size			Conversion Size		
LI	OD		LI	OD	
205/40R17	80	596	225/35R17	82	590
215/40R17	83	604	245/35R17	87	604
235/40R17	90	620	275/35R17	94	624
245/40R17	91	628	275/35R17	94	624
			285/30R18	93	629
225/40R18	88	637	255/35R18	90	635
			265/35R18	93	643
			265/30R19	89	643
235/40R18	91	645	265/35R18	93	643
			275/35R18	95	649
245/40R18	93	653	275/35R18	95	649
			285/35R18	97	657
255/40R18	95	661	285/35R18	97	657
			295/35R18	99	663
265/40R18	97	669	295/35R18	99	663
255/40R19	96	687	285/35R19	99	683

Actual Size			Conversion Size		
LI	OD		LI	OD	
255/35R18	90	635	285/30R18	93	629
255/35R20	93	686	285/30R20	95	680

## NOTES :

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.

# General Information

## 11. Rims Conversion Chart (Source ETRTO 2004)

### RIMS FOR '90', '85', '80' AND '75' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS							
<b>'90' SERIES - TWIN APPLICATION</b>										
125/90	R	16, 17	3J							
<b>'85' SERIES - TWIN APPLICATION</b>										
125/85	R	16	3J							
<b>'80' SERIES</b>										
125/80	R	13	3.00 B	3J	<b>3.50B</b>	<b>3 1/2J</b>	4.00B	4J		
135/80	R	12	<b>3.50B</b>	4.00B	4.50B					
	R	13	<b>3.50B</b>	<b>3 1/2J</b>	4.00B	4J	4.50B	4 1/2J		
	R	15	<b>3 1/2J</b>	4J	4 1/2J					
145/80	R	10, 12	3.50B	<b>4.00B</b>	4.50B	5.00B				
	R	13, 14	3.50B	<b>3 1/2J</b>	<b>4.00B</b>	<b>4J</b>	4.50B	4 1/2J	5.00B	5J
155/80	R	10, 12	4.00B	<b>4.50B</b>	5.00B					
	R	13, 14	4.00B	4J	<b>4.50B</b>	<b>4 1/2J</b>	5.00B	5J		
	R	15	4J	4 1/2J		5J				
165/80	R	13	4.00B	4J	<b>4.50B</b>	<b>4 1/2J</b>	5.00B	5J	5.50B	5 1/2J
	R	14, 15, 16	4J	4 1/2J		5J		5 1/2J		
175/80	R	13	4.50B	4 1/2J	<b>5.00B</b>	<b>5J</b>	5.50B	5 1/2J	6.00B	6J
	R	14	4 1/2J	<b>5J</b>	5 1/2J		6J			
185/80	R	13	4.50B	4 1/2J	<b>5.00B</b>	<b>5J</b>	5.50B	5 1/2J	6.00B	6J
	R	14, 15	4 1/2J	<b>5J</b>	5 1/2J		6J			
195/80	R	15	5J	<b>5 1/2J</b>		6J		6 1/2J		
205/80	R	16	5J	<b>5 1/2J</b>		6J		6 1/2J		
215/80	R	15, 16	5 1/2J	<b>6J</b>		6 1/2J		7 J		
235/80	R	16	6J	<b>6 1/2J</b>		7J		7 1/2J		
275/80	R	15	7J	<b>7 1/2J</b>		8J		8 1/2J		
<b>'75' SERIES</b>										
165/75	R	13	4.00B	<b>4.50B</b>		5.00B				
175/75	R	15	4 1/2J	<b>5J</b>		5 1/2J		6J		
185/75	R	14	4 1/2J	<b>5J</b>		5 1/2J		6J		
195/75	R	14	5J	<b>5 1/2J</b>		6J		6 1/2J		
205/75	R	14, 15	5J	<b>5 1/2J</b>		6J		6 1/2J		7J
215/75	R	14, 15, 16	5 1/2J	<b>6J</b>		6 1/2J		7J		
225/75	R	15, 16	<b>6J</b>	6 1/2J		7J		7 1/2J		
235/75	R	15, 16	6J	<b>6 1/2J</b>		7J		7 1/2J		8J
245/75	R	16	6 1/2J	<b>7J</b>		7 1/2J		8J		
255/75	R	15	6 1/2J	<b>7J</b>		7 1/2J		8J		8 1/2J
265/75	R	15, 16	7J	<b>7 1/2J</b>		8J		8 1/2J		9J

The Measuring rim widths are shown in bold.

- CONSULT THE TYRE MANUFACTURER WITH REGARD TO : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

# General Information

## RIMS FOR '70' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS							
135/70	R	13, 14	3.50B	31/2J	<b>4.00B</b>	4J	4.50B	41/2J		
	R	15	31/2J	<b>4J</b>	41/2J					
145/70	R	12	3.50B	4.00B	<b>4.50B</b>	5.00B				
	R	13, 14	3.50B	31/2J	4.00B	4J	<b>4.50B</b>	<b>41/2J</b>	5.00B	5J
155/70	R	15	31/2J	4J	<b>41/2J</b>	5J				
	R	12	4.00B	4.50B	5.00B					
165/70	R	13, 14	4.00B	4J	<b>4.50B</b>	<b>41/2J</b>	5.00B	5J		
	R	15	4J	<b>41/2J</b>	5J					
175/70	R	10, 12	4.00B	4.50B	<b>5.00B</b>	5.50B				
	R	13	4.00B	4J	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J
185/70	R	14	4J	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	
	R	15	4J	41/2J	<b>5J</b>	51/2J				
175/70	R	13	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J
	R	14	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6J		
185/70	R	15, 16	41/2J	<b>5J</b>	51/2J	6J				
	R	13	4.50B	41/2J	5.00B	5J	<b>5.50B</b>	<b>51/2J</b>	6.00B	6J
195/70	R	14, 15, 17	41/2J	5J	<b>51/2J</b>	6J				
	R	13	5.00B	5J	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J	
205/70	R	14, 15	5J	51/2J	<b>6J</b>	61/2J				
	R	14, 15, 16	5J	51/2J	<b>6J</b>	61/2J	7J			
215/70	R	14, 15, 16	51/2J	6J	<b>61/2J</b>	7J				
225/70	R	14, 15, 16, 17	6J	<b>61/2J</b>	7J	71/2J				
235/70	R	15, 16, 17	6J	61/2J	<b>7J</b>	71/2J	8J			
245/70	R	15, 16, 17	61/2J	<b>7J</b>	71/2J	8J				
255/70	R	15, 16, 18	61/2J	7J	<b>71/2J</b>	8J	81/2J			
265/70	R	15, 16, 17	7J	71/2J	<b>8J</b>	81/2J	9J			
275/70	R	16	7J	71/2J	<b>8J</b>	81/2J	9J			

## RIMS FOR '65' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS							
145/65	R	13, 14	4.00B	4J	<b>4.50B</b>	<b>41/2J</b>	5.00B	5J		
	R	15	4J	<b>41/2J</b>	5J					
155/65	R	13, 14	<b>4.50B</b>	<b>41/2J</b>	5.00B	5J	5.50B	51/2J		
	R	15	<b>41/2J</b>	5J	51/2J					
165/65	R	13	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J
	R	14	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6J	
175/65	R	15	41/2J	<b>5J</b>	51/2J	6J				
	R	13	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J		
185/65	R	14	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6J			
	R	15	<b>5J</b>	51/2J	6J					
185/65	R	14, 15, 16, 17	5J	<b>51/2J</b>	6J	61/2J				
195/65	R	14, 15, 16	51/2J	<b>6J</b>	61/2J	7J				
205/65	R	14, 15, 16	51/2J	<b>6J</b>	61/2J	7J	71/2J			
215/65	R	14, 15, 16	6J	<b>61/2J</b>	7J	71/2J				
225/65	R	15, 16, 17	6J	<b>61/2J</b>	7J	71/2J	8J			
235/65	R	16, 17, 18	61/2J	<b>7J</b>	71/2J	8J	81/2J			
245/65	R	17	<b>7J</b>	71/2J	8J	81/2J				
255/65	R	15, 16, 17	7J	<b>71/2J</b>	8J	81/2J	9J			
265/65	R	17	71/2J	<b>8J</b>	81/2J	9J	91/2J			
275/65	R	17, 18	71/2J	<b>8J</b>	81/2J	9J	91/2J			
285/65	R	16	8J	<b>81/2J</b>	9J	91/2J	10J			

The Measuring rim widths are shown in bold.

- CONSULT THE TYRE MANUFACTURER WITH REGARD TO : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

# General Information

## RIMS FOR '60' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS							
145/60	R	13	4J	<b>41/2J</b>	5J					
155/60	R	13	<b>4.50B</b>	<b>41/2J</b>	5.00B	5J	5.50B	51/2J		
165/60	R	12	4.50B	<b>5.00B</b>	5.50B	<b>6.00B</b>				
	R	13	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J
175/60	R	14	41/2J	<b>5.00B</b>	<b>5J</b>	51/2J	6J			
	R	13	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J		
	R	14	<b>5.00B</b>	<b>5J</b>	51/2J	6J				
185/60	R	15, 16	<b>5J</b>	51/2J	6J					
	R	13	5.00B	5J	<b>5.50B</b>	<b>51/2J</b>	6.00B	6J	61/2J	
	R	14, 15, 16	5J	<b>51/2J</b>	6J	61/2J				
195/60	R	13	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J	7J		
	R	14, 15, 16	51/2J	<b>6J</b>	61/2J	7J				
205/60	R	14, 15, 16	51/2J	<b>6J</b>	61/2J	7J	71/2J			
215/60	R	13	6.00B	6J	<b>61/2J</b>	7J	71/2J			
	R	14, 15, 16, 17	6J	<b>61/2J</b>	7J	71/2J				
225/60	R	14, 15, 16, 17	6J	<b>61/2J</b>	7J	71/2J	8J			
235/60	R	14, 15, 16, 17, 18	61/2J	<b>7J</b>	71/2J	8J	81/2J			
245/60	R	14, 15, 16, 17	<b>7J</b>	71/2J	8J	81/2J				
255/60	R	15, 16, 17, 18	7J	<b>71/2J</b>	8J	81/2J	9J			
265/60	R	17, 18	71/2J	<b>8J</b>	81/2J	9J	91/2J			
275/60	R	15, 16, 17, 18, 20	71/2J	<b>8J</b>	81/2J	9J	91/2J			
285/60	R	17, 18	<b>8J</b>	<b>81/2J</b>	9J	91/2J	10J			
305/60	R	18	81/2J	<b>9J</b>	91/2J	10J	101/2J	11J	111/2J	
345/60	R	17	91/2J	<b>10J</b>	101/2J	11J	111/2J	12J		

## RIMS FOR '55' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS							
155/55	R	14								
165/55	R	12	4.50B	<b>5.00B</b>	5.50B	<b>6.00B</b>				
	R	13	4.50B	41/2J	<b>5.00B</b>	<b>5J</b>	5.50B	51/2J	6.00B	6J
175/55	R	14	41/2J	<b>5J</b>	51/2J	6J				
	R	13	5.00B	5J	<b>5.50B</b>	<b>51/2J</b>	6.00B	6J		
185/55	R	15, 16, 17	5J	<b>51/2J</b>	6J					
	R	13	5.00B	5J	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J	
195/55	R	14, 15, 16	5J	51/2J	<b>6J</b>	61/2J				
	R	13	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J	7J		
205/55	R	14, 15, 16	51/2J	<b>6J</b>	61/2J	7J				
	R	13	5.50B	51/2J	6.00B	<b>6J</b>	61/2J	7J	71/2J	
205/55	R	14, 15, 16, 17, 18	51/2J	6J	<b>61/2J</b>	7J	71/2J			
215/55	R	15, 16, 17	6J	61/2J	<b>7J</b>	71/2J				
225/55	R	13, 14, 15, 16, 17, 18	6J	61/2J	<b>7J</b>	71/2J	8J			
235/55	R	15, 16, 17	61/2J	7J	<b>71/2J</b>	8J	81/2J			
245/55	R	16, 17, 18	7J	<b>71/2J</b>	8J	81/2J				
255/55	R	16, 17, 18, 19	7J	71/2J	<b>8J</b>	81/2J	9J			
265/55	R	18	71/2J	8J	<b>81/2J</b>	9J	91/2J			
275/55	R	15, 17, 19, 20	71/2J	8J	<b>81/2J</b>	9J	91/2J			
285/55	R	18, 19, 20	8J	81/2J	<b>9J</b>	91/2J	10J			

The Measuring rim widths are shown in bold.

- **CONSULT THE TYRE MANUFACTURER WITH REGARD TO** : the use of B flange rims with tyres for which B flange rims are not specified above.
- **CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS** for confirmation of the suitability of the tyre/wheel assembly to the intended service.

# General Information

## RIMS FOR '50' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS						
165/50	R	15	41/2J	<b>5J</b>	51/2J	<b>6J</b>			
175/50	R	13	5.00B	5J	<b>5.50B</b>	<b>51/2J</b>	6.00B	6J	
	R	14, 15, 16	5J	<b>51/2J</b>	6J				
185/50	R	13	5.00B	5J	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J
	R	14, 16	5J	51/2J	<b>6J</b>	61/2J			
195/50	R	13	5.50B	51/2J	<b>6.00B</b>	<b>6J</b>	61/2J	7J	
	R	15, 16	51/2J	<b>6J</b>	61/2J	7J			
205/50	R	13	5.50B	51/2J	6.00B	6J	<b>61/2J</b>	7J	71/2J
	R	14, 15, 16, 17	51/2J	6J	<b>61/2J</b>	7J	71/2J		
215/50	R	13	6.00B	6J	61/2J	<b>7J</b>	71/2J		
	R	15, 16, 17, 18	6J	61/2J	<b>7J</b>	71/2J			
225/50	R	15, 16, 17	6J	61/2J	<b>7J</b>	71/2J	8J		
235/50	R	16, 17, 18	61/2J	7J	<b>71/2J</b>	8J	81/2J		
245/50	R	15, 16, 17, 18, 19	7J	<b>71/2J</b>	8J	81/2J			
255/50	R	16, 17, 18, 19, 20	7J	71/2J	<b>8J</b>	81/2J	9J		
265/50	R	16, 20	71/2J	8J	<b>81/2J</b>	9J	91/2J		
275/50	R	17, 18, 19, 20	71/2J	8J	<b>81/2J</b>	9J	91/2J		
285/50	R	15, 18, 20	8J	81/2J	<b>9J</b>	91/2J	10J		
295/50	R	15, 16, 20	8J	81/2J	9J	<b>91/2J</b>	10J	101/2J	
305/50	R	15	81/2J	9J	<b>91/2J</b>	10J	101/2J	11J	
315/50	R	22	81/2J	9J	<b>91/2J</b>	10J	101/2J	11J	
325/50	R	20	9J	91/2J	<b>10J</b>	101/2J	11J	111/2J	

## RIMS FOR '45' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS						
165/45	R	15	5J	<b>51/2J</b>	6J				
175/45	R	15	51/2J	<b>6J</b>	61/2J				
185/45	R	15	<b>6J</b>	61/2J	7J				
195/45	R	13, 14, 15, 16, 17	6J	<b>61/2J</b>	7J	71/2J			
205/45	R	14, 15, 16, 17, 18	61/2J	<b>7J</b>	71/2J				
215/45	R	15, 16, 17, 18	<b>7J</b>	71/2J	8J				
225/45	R	13, 16, 17, 18, 19	7J	<b>71/2J</b>	8J	81/2J			
235/45	R	15, 17, 18, 19	71/2J	<b>8J</b>	81/2J	9J			
245/45	R	13, 16, 17, 18, 19	71/2J	<b>8J</b>	81/2J	9J			
255/45	R	15, 17, 18, 19	8J	<b>81/2J</b>	9J	91/2J			
265/45	R	20	81/2J	<b>9J</b>	91/2J	10J	101/2J		
275/45	R	13, 17, 18, 19, 20, 22	81/2J	<b>9J</b>	91/2J	10J	101/2J		
285/45	R	18, 19, 20, 21	9J	<b>91/2J</b>	10J	101/2J			
295/45	R	18, 19, 20	91/2J	<b>10J</b>	101/2J	11J			
305/45	R	20, 22	91/2J	<b>10J</b>	101/2J	11J	111/2J		

## RIMS FOR '40' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS						
195/40	R	14, 16, 17	61/2J	<b>7J</b>	71/2J				
205/40	R	13, 16, 17, 18	7J	<b>71/2J</b>	8J				
215/40	R	14, 15, 16, 17, 18	7J	<b>71/2J</b>	8J	81/2J			
225/40	R	14, 16, 17, 18, 19	71/2J	<b>8J</b>	81/2J	9J			
235/40	R	17, 18, 19	8J	<b>81/2J</b>	9J	91/2J			
245/40	R	17, 18, 19, 20	8J	<b>81/2J</b>	9J	91/2J			
255/40	R	16, 17, 18, 19	81/2J	<b>9J</b>	91/2J	10J			
265/40	R	17, 18	9J	<b>91/2J</b>	10J	101/2J			
275/40	R	17, 18, 19, 20	9J	<b>91/2J</b>	10J	101/2J	11J		
285/40	R	15, 17, 18, 19, 20	91/2J	<b>10J</b>	101/2J	11J			
295/40	R	17, 18, 20, 22, 24	10J	<b>101/2J</b>	11J	111/2J			
305/40	R	22, 23	10J	<b>101/2J</b>	11J	111/2J	12J		
315/40	R	23	101/2J	<b>11J</b>	111/2J	12J	121/2J		
325/40	R	22	11J	<b>111/2J</b>	12J	121/2J	13J		

# General Information

## RIMS FOR '35' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS			
215/35	R	16, 17, 18, 19	7J	<b>7 1/2J</b>	8J	8 1/2J
225/35	R	17, 18, 19	7 1/2J	<b>8J</b>	8 1/2J	9J
235/35	R	15, 18, 19	8J	<b>8 1/2J</b>	9J	9 1/2J
245/35	R	15, 16, 17, 18, 19, 20, 21	8J	<b>8 1/2J</b>	9J	9 1/2J
255/35	R	14, 16, 18, 19, 20, 21	8 1/2J	<b>9J</b>	9 1/2J	10J
265/35	R	17, 18, 19, 20, 22	9J	<b>9 1/2J</b>	10J	10 1/2J
275/35	R	17, 18, 19, 20, 22	9J	<b>9 1/2J</b>	10J	10 1/2J 11J
285/35	R	18, 19, 21, 22	9 1/2J	<b>10J</b>	10 1/2J	11J
295/35	R	18, 19, 24	10J	<b>10 1/2J</b>	11J	11 1/2J
305/35	R	23, 24	10J	<b>10 1/2J</b>	11J	11 1/2J 12J
315/35	R	17, 20, 24	10 1/2J	<b>11J</b>	11 1/2J	12J 12 1/2J
335/35	R	17	11J	11 1/2J	<b>12J</b>	12 1/2J 13J
345/35	R	15, 18, 19	11 1/2J	<b>12J</b>	12 1/2J	13J 13 1/2J

## RIMS FOR '30' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS			
225/30	R	18, 19, 20	<b>8J</b>			
245/30	R	19, 20	<b>8J</b>	8 1/2J	9J	
255/30	R	18, 19, 20, 21, 22	8 1/2J	<b>9J</b>	9 1/2J	
265/30	R	18, 19, 20, 22	9J	<b>9 1/2J</b>	10J	
275/30	R	19, 20, 23	<b>9J</b>	9 1/2J	10J	
285/30	R	18, 19, 20, 21, 22	9 1/2J	<b>10J</b>	10 1/2J	
295/30	R	18, 19, 21, 22	10J	<b>10 1/2J</b>	11J	
305/30	R	19	10 1/2J	<b>11J</b>	11 1/2J	
315/30	R	18, 22, 24	10 1/2J	<b>11J</b>	11 1/2J	
325/30	R	18, 17, 21	11J	<b>11 1/2J</b>	12J	
335/30	R	18, 20	11 1/2J	<b>12J</b>	12 1/2J	
345/30	R	19	11 1/2J	<b>12J</b>	12 1/2J	

## RIMS FOR '25' SERIES - METRIC DESIGNATION

TYRE SIZE			APPROVED RIMS			
275/25	R	20	<b>10J</b>			
285/25	R	20	<b>10 1/2J</b>			
295/25	R	20, 21, 22	10J	<b>10 1/2J</b>	11J	
305/25	R	19, 20, 23	10 1/2J	<b>11J</b>	11 1/2J	
315/25	R	19, 23	11J	<b>11 1/2J</b>	12J	
325/25	R	20	11 1/2J	<b>12J</b>	12 1/2J	
335/25	R	19	11 1/2J	<b>12J</b>	12 1/2J	
345/25	R	20	12J	<b>12 1/2J</b>	13J	
355/25	R	19	12 1/2J	<b>13J</b>	13 1/2J	

The Measuring rim widths are shown in bold.

- **CONSULT THE TYRE MANUFACTURER WITH REGARD TO** : the use of B flange rims with tyres for which B flange rims are not specified above.
- CONSULT THE TYRE AND RIM/WHEEL MANUFACTURERS for confirmation of the suitability of the tyre/wheel assembly to the intended service.

## LEGEND:



Series

Pattern Spec

Tyre Size

Load Index

Speed Symbol

Measuring Rim

Overall Diameter

Overall Width

Static Loaded Radius









Rolling Circumference

# Technology Guide



Technology	What it is	What it does
 <p>Flat Force Block</p>	<p>An improved tread block design which varies the angle of the block edges in accordance with their size.</p>	<p>More even block stiffness means more uniform contact pressure as the tyre rotates, resulting in a smoother ride.</p>
 <p>Silica</p>	<p>Innovative reinforcing material in the tread compound, used wholly or partially as a substitute for carbon black.</p>	<p>Improves grip and roadholding, especially in wet or low temperature conditions. Silica also significantly reduces energy loss from the tread compound, thus reducing rolling resistance.</p>
 <p>Super Slant</p>	<p>Tread pattern grooves which travel from tread centre to shoulder at a high angle, usually replacing circumferential grooves.</p>	<p>More efficient water clearance to the side and rear, improving resistance to aquaplaning. Better contact pressure distribution improves wet and dry handling.</p>
 <p>Rim Guard</p>	<p>Raised rubber ridge encircling the lower sidewall above the rim-fit line.</p>	<p>Provides protection against kerbing damage for both the tyre and the rim, also enhances tyre appearance.</p>
 <p>Multicell Compound</p>	<p>A highly advanced and unique foam rubber based compound.</p>	<p>The high porosity of multicell compound enables water absorption and increased edge effect to provide excellent grip even on ice.</p>
 <p>Zig-Zag Sipes</p>	<p>Tread blocks with zig-zag shaped siping.</p>	<p>Increased 'edge effect' for improved grip on snow and ice surfaces.</p>
 <p>Riblet</p>	<p>Circumferential, micro-grooves on the tread surface of multicell compound tyres when new.</p>	<p>Absorbs film of water on ice surface for improved grip when the tyre is new and before multicell pores are exposed.</p>
 <p>Asymmetric Tread Design</p>	<p>The outside of the pattern design is different to the inside. An optimum design to balance both dry and wet performance with big and stiff blocks on the outside for dry and wider channels for wet (water drainage) on the inside.</p>	



# Technology Guide

Technology	What it is
 <p>Snow Share Force Simulation</p>	<p>Pattern designed by utilizing Snow Share Force Simulation which optimizes the snow performance without sacrificing other performances.</p>
 <p>3D Blade Sipes</p>	<p>3 dimensional sipe design for improved dry handling and high level winter performances.</p>
 <p>Edge Pressure Simulation</p>	<p>Method to more efficient design the sipe layout and distribution.</p>
 <p>Irregular Stud Lines</p>	<p>Ensure maximum performance of each single stud on ice surface and hard packed snow.</p>
 <p>Ha Oil-Free Compound</p>	<p>Environmentally friendly compound by eliminating aromatic oil content.</p>
 <p>Stud Hole Shape</p>	<p>Preshaped stud hole for better stud retention and longer life time. More even stud protrusion level during tyre's life cycle.</p>
 <p>3D Block Edge Design</p>	<p>Supports block stiffness and therefore increases snow penetration performance of each block. This effect increases traction on snow.</p>
 <p>Snow Simulation</p>	<p>Simulation software which enables to optimize the pattern design for a maximum possible snow performance characteristic.</p>

# Technology Guide

Technology	What it is
 <p>Noise Reduction</p>	Technology applied during development to achieve the lowest possible noise emission by optimization of tread pattern design.
 <p>High Sipe Density</p>	To maximize grip without sacrificing block rigidity.

# Tyre Size Chart PSR

Aspect ratio	Tyre size	POTENZA	RE050A	RE050	RE040	Other	TURANZA	ER300	Other	B-SERIES	B250	Other	
82 series	195/82R14RFD											S(9)	
80 series	135/80R13											T(7)	
	145/80R13											T(7)	
	155/80R13											T(7/10)	
	165/80R13											T(7)	
	145/80R14											T(12)	
70 series	175/80R14											T(8)	
	145/70R12											S(13)	
	145/70R13											T(7)	
	155/70R13									T			
	165/70R13									T			
	175/70R13									T			
	185/70R13											T(7)	
	165/70R14									S/T		T(10)	
	175/70R14									T/H		T/H(10)	
	185/70R14											T(7)/H(10)	
	195/70R14											T(8)	
195/70R14RFD											S(14)		
195/70R15											S(13)		
195/70R15RFD											T(8)		
65 series	145/65R13											S(15)	
	155/65R13												
	165/65R13											T	
	175/65R13											S/T(16)	
	155/65R14											T	
	165/65R14											T(12)	
	175/65R14											S/T(10)	
	185/65R14											T/H(10)	
	195/65R14					H(17)						T/H(10)	
	145/65R15					V(17)						T(7)	
	165/65R15											T(18)	
	175/65R15											T	
	185/65R15											T(10)	
	195/65R15					V(19)	H					T/H	
	195/65R15RFD						H/V					H(10)	
205/65R15							H/V(6)				T/H		
215/65R15								V(6)					
60 series	165/60R14											T(8/13)/H(13)	
	175/60R14											T(7)	
	185/60R14											T(10/20)/H(20)	
	195/60R14												
	185/60R15												
	195/60R15												
	205/60R15												
	225/60R15												
	195/60R16												
	205/60R16												
	205/60R16XL												
	215/60R16												
	225/60R16												
	235/60R16												
	225/60R17												
	55 series	165/55R14											
		185/55R14											
175/55R15													
185/55R15													
195/55R15													
205/55R15													
175/55R16													
195/55R16													
205/55R16													
205/55R16XL													
215/55R16													

(1) RE720 - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) ER42 - (12) B381 - (13) B390 - (14) S226 - (15) GR1 - (16) S322 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE88 - (22) RE71 - (23) RE031 - (24) RE030 - (25) RE010 - (26) ER31 - (27) EL42 - (28) ER33

In red: RFT

# Tyre Size Chart PSR

Aspect ratio	Tyre size	POTENZA	RE030A	RE050	RE040	Other	TURANZA	ER300	Other	B-SERIES	B250	Other	
55 series	215/55R16XL							H/V/W/Y	V(6)				
	225/55R16				V			V/W/Y	H(27)				
	225/55R16XL							Y					
	175/55R17				W								
	215/55R17								V(28)				
	225/55R17								Y				
	225/55R17XL	Y											
	235/55R17				Y			W	Y(6)				
235/55R18						V(23)							
50 series	165/50R15				V								
	195/50R15					H/V(1)		H/V	H/V(6)			T(18)	
	205/50R15			V	V	H(11)/Y(25)							
	205/50R16		V			V(25)/W(2)		H/W					
	215/50R16					W(25)							
	225/50R16	W	V/W			Y(25)/Z(34)/W(4)		V/W	V/W(6)				
	205/50R17	V/W		V		Z(3/4/5)		W					
	205/50R17XL	Y											
	215/50R17					Z(3)		W					
	225/50R17			W/Y				W					
	225/50R17XL	Y											
	245/50R17			W									
	235/50R18XL				Y								
	245/50R18								W(6)/V(27)/W(11)				
45 series	205/45R16							W				H(18)	
	205/45R16XL							W	H/W(6)				
	215/45R16				W								
	225/45R16					Y(2)							
	245/45R16					Z(3/4)							
	205/45R17	V			W								
	205/45R17XL	V/W											
	215/45R17	W	V/W/V	W/Z	Y(2)/W(25)			W	W(6)				
	215/45R17RFD		V/W										
	225/45R17	V/W/Y/V/W/Y	Y/W/W	W/Y/Z	W(3)/Z(4)			W	H(27)/W(27)/W(6)				
	225/45R17XL	V/Y	Y/W/Y	W									
	235/45R17	W/Y	Y/Y		Z(24)/Z(22)								
	235/45R17XL	W						W					
	245/45R17	Y	W/Y/W/Y										
	245/45R17XL	Y											
	255/45R17					Y/Z(3)							
	215/45R18	W				Y(5)							
	215/45R18XL	Y											
	225/45R18	Y			W								
	225/45R18XL	Y			Y								
	235/45R18	Y											
	235/45R18XL	Y											
	245/45R18	Y/W	Y/Y	W/Y/W	Y(2)				W(28)				
	245/45R18XL		Y/H										
	255/45R18	Y	Y/Y	Y									
	255/45R18XL			Y									
	275/45R18		Y/Y										
	245/45R19	Y											
40 series	205/40R17	Y		W									
	205/40R17XL	W											
	215/40R17	Y		Y									
	215/40R17XL	Y											
	235/40R17	Y			Z(3)								
	245/40R17	W	W/Y/W										
	245/40R17XL		Y										
	255/40R17	Y/V/W/Y		Y	Z(3/5)/Z(22)								
	265/40R17				Y(2)								
	265/40R17				Y(3)								
	205/40R18		W										
	225/40R18	Y/W/Y		Y	Z(3/4/5)								

(1) RE720 - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) ER42 - (12) B381 - (13) B390 - (14) S226 - (15) GR1 - (16) S322 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE88 - (22) RE71 - (23) RE031 - (24) RE030 - (25) RE010 - (26) ER31 - (27) EL42 - (28) ER33

In red: RFT

# Tyre Size Chart PSR

Aspect ratio	Tyre size	POTENZA	RE050A	RE050	RE040	Other	TURANZA	ER300	Other	B-SERIES	B250	Other	
40 series	225/40R18XL	Y											
	235/40R18	Y/Z			Z	Y(4)			Y				
	235/40R18XL	Y											
	245/40R18	Y/W/Y	Z		Z	Y(4)							
	245/40R18XL	Y		Y									
	255/40R18	W/Y/Y											
	255/40R18XL	Y											
	265/40R18	Y	Y/Y			Z(3)							
	265/40R18XL	Y											
	275/40R18	Y/W			W	Y(5)							
	285/40R18	Y	Y										
	225/40R19XL	Y											
	235/40R19	Y											
	245/40R19	W/Y											
	245/40R19RFD					Y(2)							
	255/40R19			Y		Y(2)/Z(4)							
	255/40R19XL			Z	Y								
	275/40R19	Y	Y										
	275/40R19XL			Z									
	285/40R19	Y											
	245/40R20	Y											
	35 series	275/35R17					Z(3)						
		335/35R17					Z(3)						
225/35R18RFD						Y(2)							
245/35R18XL		Y											
255/35R18		Y/W/Y			Y								
255/35R18XL		Y											
265/35R18		Y				Y(4)/Z(4/5)							
265/35R18XL			Z										
275/35R18		Y/W/Y											
285/35R18		Y/W/Y											
295/35R18		Y											
225/35R19		Y											
225/35R19XL		W/Y											
235/35R19		Y/Z											
235/35R19RFD						Y(2)							
245/35R19		Y											
245/35R19RFD						Y(2)							
255/35R19		Y											
255/35R19XL		Y											
265/35R19		Y											
265/35R19XL		Y											
275/35R19		Y/W											
285/35R19		Y											
345/35R19		Y											
245/35R20		Y											
245/35R20XL		W/Y											
255/35R20XL		Y											
265/35R20XL		Y											
275/35R20		Y											
275/35R20XL		Y											
305/35R20	Y												
30 series	285/30R18	Y				Z(4/5)							
	295/30R18XL					Z(5)							
	255/30R19XL	W/Y											
	285/30R19XL	Y											
	295/30R19	Z											
	295/30R19XL	Y											
	305/30R19	Y/Z											
	305/30R19XL	Y											
	285/30R20XL	Y											

(1) RE720 - (2) S03PP - (3) S01 - (4) S02PP - (5) S02A - (6) ER30 - (7) B330EVO - (8) B330 - (9) S381 - (10) B391 - (11) ER42 - (12) B381 - (13) B390 - (14) S226 - (15) GR1 - (16) S322 - (17) RE88 - (18) B340 - (19) RE080 - (20) B371 - (21) RE88 - (22) RE71 - (23) RE031 - (24) RE030 - (25) RE010 - (26) ER31 - (27) EL42 - (28) ER33

In red: RFT

# Tyre Size Chart PXR

Aspect ratio	Tyre size	LAMELLE N	Blizzak LM-20	Blizzak LM-25	Blizzak LM-18	Blizzak LM-22	NORDIC	Blizzak Nordic	Blizzak WS-50	Noranza
80 series	145/80R13				Q					
	155/80R13				Q			Q	Q	
	165/80R13								Q	
	145/80R14				Q					
	165/80R14				Q					
	175/80R14				T					Q
70 series	145/70R13				T					
	155/70R13		T							T
	165/70R13		T							T
	175/70R13		T					TL		T
	185/70R13							Q		
	165/70R14		T							T
	175/70R14		T							T
	185/70R14		T					TL		T
	195/70R14		T					Q		
	195/70R14XL				T					
	205/70R14							Q		
	195/70R15XL				S					
	205/70R15							Q		
	65 series	145/65R13							Q(1)	
155/65R13								Q(2)		
175/65R13			T							
155/65R14			T							
165/65R14			T							T
175/65R14			T					TL		T
185/65R14			T					TL		T
195/65R14					T			Q		
145/65R15					T					
165/65R15			T							
175/65R15					T					
185/65R15			T					TL		T
195/65R15				T/H				TL		T
195/65R15XL				T						
205/65R15				T/H				TL		T
215/65R15				H					Q	
215/65R16XL										T
235/65R17XL					H					
60 series	165/60R14		T							
	185/60R14		T					TL		
	185/60R15				T			TL		
	185/60R15XL				T					
	195/60R15		T		H			TL		T
	205/60R15			T/H					Q	
	225/60R15			H						
	195/60R16			H						
	205/60R16			H						T
	205/60R16XL							TL		
	215/60R16							TL		
	225/60R16			H					Q	
	235/60R16					H			Q	T
	225/60R17					H				

(1) MZ01 - (2) MZ02 - (3) MZ03

In red: RFT

# Tyre Size Chart PXR

Aspect ratio	Tyre size	LAMELLE N	Blizzak LM-20	Blizzak LM-25	Blizzak LM-18	Blizzak LM-22	NORDIC	Blizzak Nordic	Blizzak WS-50	Norranza
55 series	185/55R14		T							
	175/55R15			T						
	185/55R15			T/H				TL		
	195/55R15			H						T
	195/55R15XL							TL		
	205/55R15					H				
	195/55R16			T/H/H				TL		
	205/55R16			T/H		H				T
	205/55R16XL			V				TL		
	215/55R16			H						
	215/55R16XL			H/V				TL		T
	225/55R16			H						
	225/55R16XL			V				TL		
	225/55R17XL							TL		
	235/55R17					V				
235/55R18								Q		
255/55R18XL					H					
50 series	165/50R15								Q(3)	
	195/50R15			T/H						
	195/50R16			H						
	205/50R16			H					Q	
	225/50R16					H				
	205/50R17			H						
	205/50R17XL			V		H				
	225/50R17					H/V				
	225/50R17XL			V				TL		
	235/50R17					V				
	245/50R17			H						
	235/50R18XL					V				
45 series	205/45R16		H							
	215/45R17		H						Q	
	215/45R17XL		H							
	225/45R17		H/H		H/V					T
	225/45R17XL		V/H/V					TL		
	235/45R17		H						Q	
	235/45R17XL		V							
	245/45R17								Q	
	245/45R17XL		V							
	215/45R18					V				
	215/45R18XL					V				
	225/45R18XL		V							
	245/45R18		V			V				
	255/45R18XL					V				
	40 series	215/40R17					V			
245/40R17						H				
255/40R17XL			V							
225/40R18XL			V							
235/40R18XL			V							
245/40R18									Q(3)	
255/40R18XL			V							
255/40R19XL					V					
35 series	255/35R18XL		V							
	265/35R18XL		V							

(1) MZ01 - (2) MZ02 - (3) MZ03  
In red: RFT

# Tyre Size Chart DUELER

Aspect ratio	Tyre size	H/P	Dueler Sport	Dueler D680	H/L	Dueler D683	H/T	Dueler D689	Other	A/T	Dueler D694	M/T	Dueler D673	WINTER	LM25 4x4	Dueler DM23
85 series	235/85R16											Q				
82 series	195R15						Q/S	R(4)								
	215R15						S									
	205R16						Q	R/S(5)			S					
80 series	195/80R15				T			S(4)		T						Q
	215/80R15				T		S			S						Q
	225/80R15															Q
	175/80R16															Q
	205/80R16XL				T		T							T		Q
	215/80R16						S			S						Q
	235/80R16						S			S(3)						
75 series	205/75R15							S(4)								
	215/75R15						S			T		S				
	225/75R15									S(3)						
	P225/75R15									T						
	235/75R15				T		T			S		S		T		
	235/75R15XL									T				T		
	P235/75R15				H											
	265/75R15							S(8)								
	225/75R16				T					S		S		T		
	245/75R16									S		Q				
	265/75R16									S		S				
285/75R16									R							
70 series	165/70R14									T(3)						
	205/70R15							H/T/S(4)		T			T		Q	
	225/70R15							S(6)		T					Q	
	235/70R15									S					Q	
	255/70R15						R/S	S(5)								
	265/70R15			H			S/H			S				T	Q	
	215/70R16						T	H(6)		S				T	Q	
	225/70R16							S/T(6)		S						
	225/70R16XL													T/H		
	235/70R16						T/H	T/H(5)		T				T	Q	
	245/70R16			H	T		S			T					T	
	245/70R16RFD						S			S(3)						
	255/70R16						T	S(5)		S						Q
	P255/70R16				H											
	265/70R16			H	T		R/S/H			T				T	Q	
	275/70R16			H						S					Q	
	225/70R17								S(5)							Q
	65 series	185/65R14							T(5)							
205/65R16								T(5)								
215/65R16				H			S/H	T(5)(7)		T			T/H	Q		
255/65R16			H		H		T			S(3)			T/H	Q		
225/65R17								S/H(6)							Q	

(1) Dueler HT/S 686 - (2) Dueler M/T 671 - (3) Dueler A/T 693 - (4) Dueler H/T 684 - (5) Dueler H/T 840 - (6) Dueler H/T 687 - (7) Dueler H/T 688 - (8) RD-610 Steel Desert Dueler - (9) EL42 - (10) Turanza ER30

In red: RFT



# Tyre Size Chart DUELER

Aspect ratio	Tyre size	H/P	Dueler Sport	Dueler D680	H/L	Dueler D683	H/T	Dueler D689	Other	A/T	Dueler D694	M/T	Dueler D673	WINTER	LM25 4x4	Dueler DMZ3
65 series	235/65R17		V					H(5)		H(3)					H	
	235/65R17XL		V												H	
	245/65R17						T									
	265/65R17							S/H(5)		T					H	Q
	P265/65R17							S(5)								
275/65R17							T/H(5)									
60 series	P255/60R15			H(1)												
	P275/60R15			H(1)												
	235/60R16		H		H			H(6)								Q
	215/60R17			H(9)												
	225/60R17															Q
	255/60R17		H/V					T						H		
	P275/60R17			H												
	235/60R18									H(3)						
	235/60R18XL		W													
	255/60R18XL		V													
	P265/60R18			H												
	275/60R18							H(4)						H		Q
	285/60R18		V													
55 series	225/55R17		W												H	
	235/55R17		H	H(9)											H	
	275/55R17		V												H	
	235/55R18							H(6)							H	
	255/55R18			H/V(9)/W(10)												
	255/55R18XL		H/V/Y	Y(11)										H/V		
285/55R18		V														
50 series	255/50R17			H												
	235/50R18			H(9)											H	
	285/50R18		W													
	255/50R19				VW(10)											
	255/50R19XL		V/W													
	255/50R19XL		Y													
45 series	275/45R19XL		Y													
	285/45R19				VW(10)											
	285/45R19XL		V/V/W													
	275/45R20XL		Y													
40 series	275/40R20XL		Y/V/W													
35 series	315/35R20XL		V/W													
Misc	30x9.50R15									S						Q
	31x10.50R15						R			S						Q
	32x11.50R15										S					
	33x12.50R15											Q				
	37x12.50R17.5											L(2)				
	7.50R16									N		M(2)				


(1) Dueler HT/S 686 - (2) Dueler M/T 671 - (3) Dueler A/T 693 - (4) Dueler H/T 684 - (5) Dueler H/T 840 - (6) Dueler H/T 687 - (7) Dueler H/T 688 - (8) RD-610 Steel Desert Dueler - (9) EL42 - (10) Turanza ER30

In red: RFT

# Tyre Size Chart VAN

Aspect ratio	Tyre size	SUMMER	Duravis R410	Duravis R630	Other	WINTER	Blizzak W800	Blizzak LM-18C	M723	NORDIC	Blizzak W985	RD713
82 series	155/82R12C											N
	145/82R13C				N(2)				N			N
	155/82R13C				N(2)							
	165/82R14C								N			
	175/82R14C			R								
	185/82R14C			R		Q				N		N
	195/82R14C			R	Q(2)	Q				N		N
	205/82R14C								N			
	215/82R14C								Q			
	185/82R15C			R								
	195/82R15C				R(2)							N
205/82R16C											N	
80 series	165/80R13RFD		R									
75 series	175/75R14C		R									
	185/75R14C		R									
	205/75R14C				Q(2)							
	175/75R16C		R									
	185/75R16C		R	R(3)					P			
	195/75R16C		R			R				N		
	205/75R16C		R			R				N		
	215/75R16C			Q/R	R(3)/N(4)	R						
	225/75R16C				N(4)				N			
70 series	165/70R13RFD		R									
	165/70R14RFD		R									
	165/70R14C		R					R				
	195/70R15RFD		T									
	195/70R15C			R	R(3)/S(2)	R			R		N	N
	195/70R15XL											
	205/70R15C			R	S/Q(3)							
	215/70R15C			Q/R/S	S(3)	R						
225/70R15C			R/S	R(3)	R			R		N		
65 series	175/65R14RFD		T									
	175/65R14C		T					T				
	205/65R15C		T					T				
	215/65R15RFD		T									
	215/65R15C		T									
	195/65R16C		T	R		R						
	205/65R16C		T	R/T		R						
	215/65R16C											
	215/65R16C		T/H	R		R		T				
	225/65R16C			R		R						
	235/65R16C			R		R						
60 series	195/60R16C				H(5)			T				
	205/60R16C							T				
	215/60R16C		T									
	225/60R16XL		H									
55 series	205/55R16C						T(6)					
Misc.	6.00R15C				L(1)							
	6.50R15C				M(1)							

(1) R230 - (2) RD613 - (3) R623 - (4) R294 - (5) ER30C - (6) LM22C

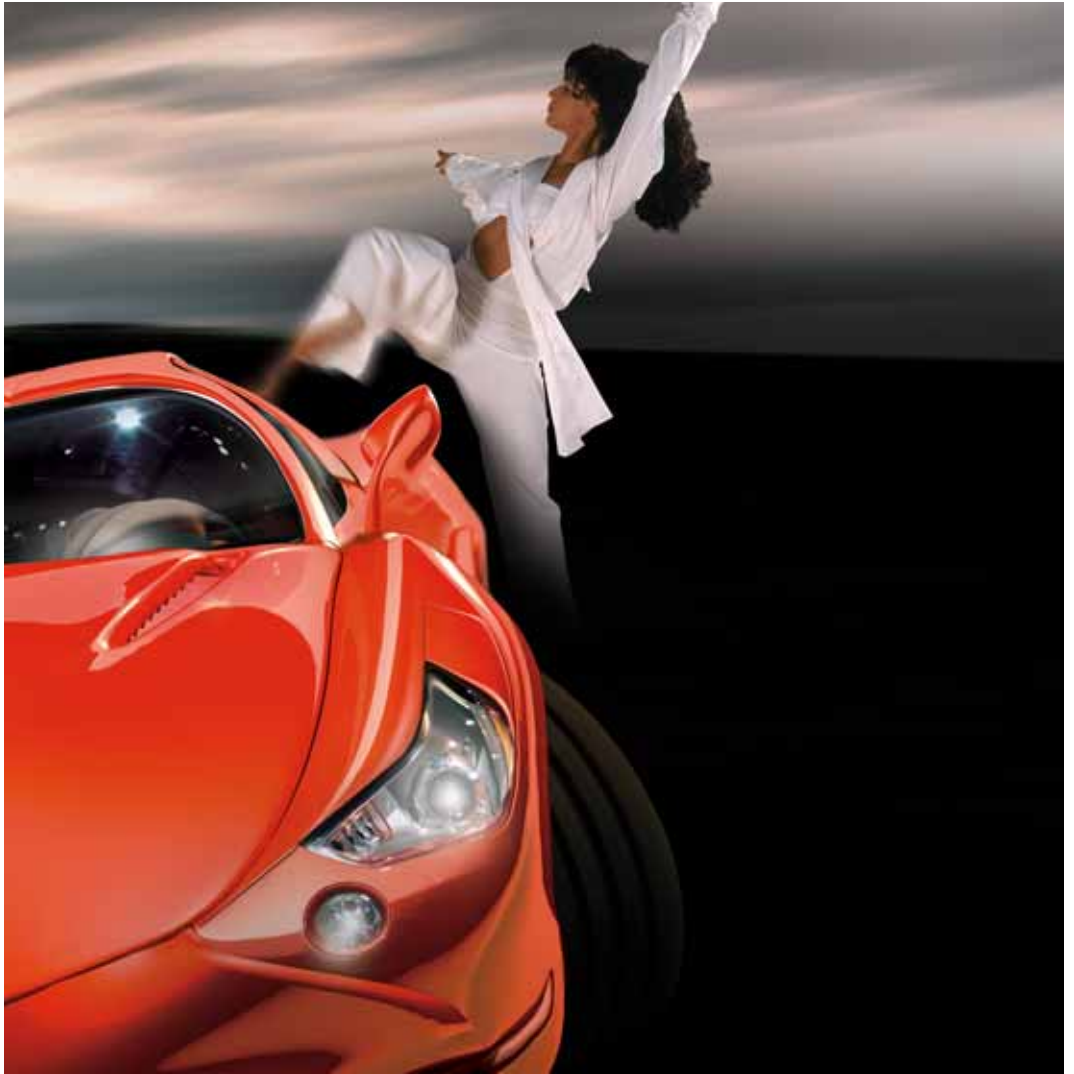

## Passenger Summer OE/Replacement

PSR

# POTENZA RE050 ASYMMETRIC



The tyre for the sporty, demanding driver in wet and dry conditions. Suitable for a wide range of models from super sport cars such as the Enzo Ferrari, to popular models like the Golf. It offers high performance with a good level of comfort and low noise. In certain sizes it is available in run flat.



55 Series	E050A	205/55	R 16	91	W	6 1/2	632	214	291	1928	
	E050A	215/55	R 16	93	V	7	642	226	295	1958	
	E050A	225/55	R 17	101 XL	Y	7	680	233	313	2074	
50 Series	E050A	205/50	R 17	93 XL	Y	6 1/2	638	214	296	1946	
	E050A I DZ*	205/50	R 17	89	V/W	6 1/2	638	214	296	1946	
	E050A Z	225/50	R 16	92	W	7	632	233	291	1928	
45 Series	E050A	225/50	R 17	98 XL	Y	7	658	233	304	2007	
	E050A Z	205/45	R 17	88 XL	W	7	616	206	288	1879	
	E050A	205/45	R 17	88 XL	V	7	616	206	288	1879	
	E050A*	205/45	R 17	84	V	7	616	206	288	1879	
	E050A CZ	215/45	R 17	87	W	7	626	213	292	1909	
	E050A EZ	215/45	R 18	89	W	7	651	213	304	1986	
	E050A KZ	215/45	R 18	89	W	7	651	213	304	1986	
	E050A TZ	215/45	R 18	93 XL	Y	7	651	213	304	1986	
	E050A CZ*	225/45	R 17	91	W	7 1/2	634	225	295	1934	
	E050A IZ	225/45	R 17	91	W/Y	7 1/2	634	225	295	1934	
	E050A	225/45	R 17	91	V/W/Y	7 1/2	634	225	295	1934	
	E050A	225/45	R 17	94 XL	V/Y	7 1/2	634	225	295	1934	
E050A	225/45	R 18	91	Y	7 1/2	659	225	307	2010		
E050A I*	225/45	R 17	91	V/W	7 1/2	634	225	295	1934		
E050AII*	225/45	R 17	91	V/W/Y	7 1/2	634	225	295	1934		
E050AII FZ*	225/45	R 17	91	V/W	7 1/2	634	225	295	1934		

XL = extra load

\*RFT: Run Flat Tyre

Rolling Circumference ± 2%

# POTENZA RE050 ASYMMETRIC



E050A 1Z	235/45	R 17	94	Y	8	644	236	299	1964	
E050A BZ	235/45	R 17	93	W	8	644	236	299	1964	
E050A	235/45	R 17	97 XL	W	8	644	236	299	1964	
E050A	235/45	R 17	94	Y	8	644	236	299	1964	
E050A	235/45	ZR 18	94	Y	8	669	236	311	2040	
E050A	235/45	R 18	98 XL	Y	8	669	236	311	2040	
E050A FZ	235/45	ZR 18	94	Y	8	669	236	311	2040	
E050A Z	245/45	R 17	95	Y	8	652	243	302	1989	
E050A	245/45	R 17	99 XL	Y	8	652	243	302	1989	
E050A 1Z	245/45	R 17	95	Y	8	652	243	302	1989	
E050A BZ*	245/45	ZR 18	96	Y	8	677	243	314	2065	
E050A CZ*	245/45	R 18	96	W	8	677	243	314	2065	
E050A KZ*	245/45	R 18	96	W	8	677	243	314	2065	
E050A	245/45	R 19	98	Y	8 1/2	703	243	327	2144	
E050A Z	255/45	R 18	99	Y	8 1/2	687	255	318	2095	

XL = extra load

\*RFT: Run Flat Tyre



\*\*Both available in RFT and non RFT version

Rolling Circumference ± 2%

# POTENZA RE050 ASYMMETRIC



40 Series	E050A Z	205/40	R 17	84 XL	W	7 1/2	596	212	280	1818
	E050A Z	205/40	R 17	80	Y	7 1/2	596	212	280	1818
	E050A Z*	205/40	R 18	82	W	7 1/2	621	212	292	1894
	E050A Z	215/40	R 17	83	Y	7 1/2	604	218	283	1842
	E050A	215/40	R 17	87 XL	Y	7 1/2	604	218	283	1842
	E050A DZ*	225/40	R 18	88	W	8	637	230	299	1943
	E050A 1Z	225/40	R 18	88	Y	8	637	230	299	1943
	E050A EZ	225/40	R 18	92 XL	Y	8	637	230	299	1943
	E050A	225/40	R 18	92 XL	Y	8	637	230	299	1943
	E050A	225/40	R 18	88	Y	8	637	230	299	1943
	E050A	225/40	R 19	93 XL	Y	8	663	230	312	2022
	E050A I*	225/40	R 18	88	W/Y	8	637	230	299	1943
	E050A 1Z	235/40	R 18	91	Y	8 1/2	645	241	302	1967
	E050A DZ	235/40	ZR 18	91	Y	8 1/2	645	241	302	1967
	E050A*	235/40	ZR 18		Z	8 1/2	645	241	302	1967
	E050A	235/40	R 18	95 XL	Y	8 1/2	645	241	302	1967
	E050A 1Z	235/40	R 18	95 XL	Y	8 1/2	645	241	302	1967
	E050A BZ	235/40	ZR 19	92	Y	8 1/2	671	241	315	2047
	E050A Z	235/40	R 17	90	Y	8 1/2	620	241	289	1891
	E050A	245/40	R 17	91	W	8 1/2	628	248	292	1915
	E050A CZ*	245/40	R 18	93	W/Y	8 1/2	653	248	305	1992
	E050A 1Z	245/40	R 18	93	Y	8 1/2	653	248	305	1992
	E050A**	245/40	R 18	93	Y	8 1/2	653	248	305	1992
	E050A CZ*	245/40	R 19	94	W	8 1/2	679	248	318	2071

XL = extra load

\*RFT: Run Flat Tyre 

\*\*Both available in RFT and non RFT version

Rolling Circumference ± 2%

# POTENZA RE050 ASYMMETRIC



E050A*	245/40 ZR 19	94	Y	8 1/2	679	248	318	2071	
E050A	245/40 R 20	95	Y	8 1/2	704	248	330	2147	
E050A Z	255/40 R 17	94	Y	9	636	260	296	1940	
E050A AZ	255/40 ZR 18	95	Y	9	661	260	308	2016	
E050A DZ	255/40 ZR 18	95	Y	9	661	260	308	2016	
E050A	255/40 R 18	95	W	9	661	260	308	2016	
E050A***	255/40 R 18	95	Y	9	661	260	308	2016	
E050A	255/40 R 18	99 XL	Y	9	661	260	308	2016	
E050All*	255/40 R 17	94	V/W/Y	9	636	260	296	1940	
E050All FZ*	255/40 R 17	94	V/W	9	636	260	296	1940	
E050A BZ	265/40 ZR 18	101 XL	Y	9 1/2	669	271	311	2040	
E050A*	265/40 ZR 18		Z	9 1/2	669	271	311	2040	
E050A CZ*	275/40 R 18	99	W	9 1/2	677	278	314	2065	
E050A	275/40 ZR 18	99	Y	9 1/2	677	278	314	2065	
E050A FZ	275/40 ZR 18	99	Y	9 1/2	677	278	314	2065	
E050A	275/40 R 19	101	Y	9 1/2	703	278	327	2144	
E050A BZ*	285/40 R 19	103	Y	10	711	290	330	2169	

XL = extra load

\*RFT: Run Flat Tyre

\*\*\*Extended tyres



Rolling Circumference ± 2%

# POTENZA RE050 ASYMMETRIC



35 Series	E050A BZ	225/35 ZR 19	84	Y	8	641	230	303	1955
	E050A*	225/35 R 19	88 XL	W/Y	8	641	230	303	1955
	E050A	235/35 ZR 19	87	Y	8 1/2	647	241	305	1973
	E050A*	235/35 ZR 19		Z	8 1/2	647	241	305	1973
	E050A	245/35 R 18	92 XL	Y	8 1/2	629	248	296	1918
	E050A BZ	245/35 R 19	89	Y	8 1/2	655	248	309	1998
	E050A	245/35 R 20	95 XL	Y	8 1/2	680	248	321	2074
	E050A*	245/35 ZR 20	91	Y	8 1/2	680	248	321	2074
	E050A 2Z	245/35 R 20	95 XL	W	8 1/2	680	248	321	2074
	E050A EZ*	255/35 R 18	90	W	9	635	260	298	1937
	E050A 1Z	255/35 R 18	90	Y	9	635	260	298	1937
	E050A 1Z	255/35 R 18	94 XL	Y	9	635	260	298	1937
	E050A I*	255/35 R 18	90	W/Y	9	635	260	298	1937
	E050A BZ	255/35 R 19	96 XL	Y	9	661	260	311	2016
	E050A	255/35 ZR 19	92	Y	9	661	260	311	2016
	E050A	255/35 R 20	97 XL	Y	9	686	260	323	2092
	E050A	255/35 ZR 20	97 XL	Y	9	686	260	323	2092
E050A 1Z	265/35 R 18	93	Y	9 1/2	643	271	301	1961	
E050A	265/35 R 20	99 XL	Y	9 1/2	694	271	327	2117	
E050A	265/35 ZR 19	94	Y	9 1/2	669	271	314	2040	
E050A	265/35 R 19	98 XL	Y	9 1/2	669	271	314	2040	

XL = extra load

\*RFT: Run Flat Tyre 

Rolling Circumference ± 2%



# POTENZA RE050 ASYMMETRIC



E050A CZ*	275/35	R 18	95	W/Y	9 1/2	649	278	303	1979	
E050A 1Z	275/35	R 18	95	Y	9 1/2	649	278	303	1979	
E050A CZ*	275/35	R 19	96	W	9 1/2	675	278	316	2059	
E050A	275/35	ZR 19	96	Y	9 1/2	675	278	316	2059	
E050A BZ	275/35	ZR 19	96	Y	9 1/2	675	278	316	2059	
E050A	275/35	R 20	98	Y	9 1/2	700	278	329	2135	
E050A	275/35	ZR 20	102 XL	Y	9 1/2	700	278	329	2135	
E050A AZ	285/35	ZR 18	97	Y	10	657	290	307	2004	
E050A	285/35	R 18	97	W	10	657	290	307	2004	
E050A***	285/35	R 18	97	Y	10	657	290	307	2004	
E050A BZ	295/35	ZR 18	99	Y	10 1/2	663	301	309	2022	
E050A BZ	285/35	ZR 19	99	Y	10	683	290	319	2083	
E050A*	305/35	ZR 20	104	Y	11	718	311	336	2190	
E050A GZ	345/35	R 19	110	Y	12	725	350	336	2211	
30 Series E050A*	255/30	R 19	91 XL	W/Y	9	637	260	302	1943	
E050A Z	285/30	R 18	93	Y	10	629	290	296	1918	
E050A BZ	285/30	R 19	98 XL	Y	10	655	290	309	1998	
E050A	285/30	R 20	99 XL	Y	10	680	290	321	2074	
E050A	295/30	ZR 19	100 XL	Y	10 1/2	661	301	311	2016	
E050A*	295/30	ZR 19		Z	10 1/2	661	301	311	2016	
E050A	305/30	ZR 19	102 XL	Y	11	667	313	313	2034	
E050A*	305/30	ZR 19		Z	11	667	313	313	2034	
E050A	305/30	ZR 19	98	Y	11	667	313	313	2034	

XL = extra load

\*RFT: Run Flat Tyre

\*\*\*Extended tyres



Rolling Circumference ± 2%

# TURANZA ER300



Bridgestone's premium touring tyre, designed to complement the engine power and ride comfort of luxury and mid-range touring models.

It is manufactured as factory fitment for leading car manufacturers and as a replacement tyre.



65 Series	ER300	185 / 65 R 15	88	H	5 1/2	621	189	284	1894
	ER300	195 / 65 R 15	91	H/V	6	635	201	290	1937
	ER300	205 / 65 R 15	94	H/V	6	647	209	294	1973
	ER300	215 / 65 R 15	96	H	6 1/2	661	221	300	2016
60 Series	ER300	185 / 60 R 14	82	H	5 1/2	578	189	265	1763
	ER300	185 / 60 R 15	84	H	5 1/2	603	189	277	1839
	ER300	195 / 60 R 14	86	H	6	590	201	269	1800
	ER300	195 / 60 R 15	88	H/V	6	615	201	282	1876
	ER300	195 / 60 R 16	89	V	6	640	201	294	1952
	ER300	205 / 60 R 15	91	H/V	6	627	209	286	1912
	ER300	205 / 60 R 16	92	H	6	652	209	299	1989
	ER300	205 / 60 R 16	96 XL	W	6	652	209	299	1989
	ER300	215 / 60 R 16	95	W	6 1/2	664	221	304	2025
	ER300	225 / 60 R 15	96	V/W	6 1/2	651	228	296	1986
	ER300	225 / 60 ZR 16	98	Y	6 1/2	676	228	308	2062
	ER300	235 / 60 ZR 16	100	Y	7	688	240	313	2098
	55 Series	ER300	195 / 55 R 15	85	H	6	595	201	274
ER300*		195 / 55 R 16	87	H/V	6	620	201	287	1891
ER300		195 / 55 R 16	87	H	6	620	201	287	1891
ER300**		205 / 55 R 16	91	H/V/W	6 1/2	632	214	291	1928
ER300		205 / 55 ZR 16	91	W	6 1/2	632	214	291	1928
ER300		205 / 55 R 16	94 XL	V	6 1/2	632	214	291	1928

XL = extra load

\*RFT: Run Flat Tyre 

\*\*Both available in RFT and non RFT version


Rolling Circumference ± 2%

# TURANZA ER300



55 Series	ER300	215/55 R 16	93	H/V/W	7	642	226	295	1958		
	ER300	215/55 ZR 16	97 XL	W	7	642	226	295	1958		
	ER300 BZ	215/55 R 16	97 XL	Y	7	642	226	295	1958		
	ER300 BZ	215/55 R 16	93	Y	7	642	226	295	1958		
	ER300	215/55 R 16	97 XL	H/W	7	642	226	295	1958		
	ER300*	215/55 R 16	97 XL	V	7	642	226	295	1958		
	ER300	225/55 ZR 16	95	W/Y	7	654	233	300	1995		
	ER300	225/55 R 16	95	V/W/Y	7	654	233	300	1995		
	ER300	225/55 R 16	99 XL	Y	7	654	233	300	1995		
	ER300	225/55 ZR 17	97	Y	7	680	233	313	2074		
ER300 PZ	235/55 R 17	99	W	7 1/2	690	245	317	2105			
50 Series	ER300	195/50 R 15	82	H/V	6	577	201	267	1760		
	ER300	205/50 R 16	87	H/W	6 1/2	612	214	283	1867		
	ER300	225/50 R 16	92	V/W	7	632	233	291	1928		
	ER300	205/50 ZR 17	89	W	6 1/2	638	214	296	1946		
	ER300	215/50 R 17	91	W	7	648	226	300	1976		
	ER300	225/50 ZR 17	94	W	7	658	233	304	2007		
45 Series	ER300	205/45 ZR 16	83	W	7	590	206	275	1800		
	ER300	205/45 R 16	83	W	7	590	206	275	1800		
	ER300	205/45 R 16	87 XL	W	7	590	206	275	1800		
	ER300	215/45 ZR 17	87	W	7	626	213	292	1909		
	ER300	225/45 ZR 17	91	W	7 1/2	634	225	295	1934		
ER300	235/45 R 17	97 XL	W	8	644	236	299	1964			
40 Series	ER300	235/40 R 18	95	Y	8 1/2	645	241	302	1967		

XL = extra load

\*RFT: Run Flat Tyre 

Rolling Circumference ± 2%

# TURANZA ER30



Grand touring tyre designed to match luxury saloons and sedans with well balanced high speed stability and superior riding comfort without sacrificing handling characteristics.

65 Series	ER30 UZ	195 / 65 R 15	91	H/V	6	635	201	290	1937		
	ER30 YZ	195 / 65 R 15	91	H/V	6	635	201	290	1937		
	ER30 AZ	195 / 65 R 15	91	V	6	635	201	290	1937		
	ER30 3Z	195 / 65 R 15	91	H	6	635	201	290	1937		
	ER30 MZ	205 / 65 R 15	94	V	6	647	209	294	1973		
60 Series	ER30	185 / 60 R 15	84	H	5 1/2	603	189	277	1839		
	ER30 MZ	195 / 60 R 15	88	H	6	615	201	282	1876		
	ER30 UZ	205 / 60 R 16	92	H	6	652	209	299	1989		
	ER30 MZ	215 / 60 R 16	95	H	6 1/2	664	221	304	2025		
	ER30 SZ	215 / 60 R 16	95	H	6 1/2	664	221	304	2025		
	ER30 LZ	215 / 60 R 16	95	H	6 1/2	664	221	304	2025		
	ER30	235 / 60 R 16	100	Y	7	688	240	313	2098		
	ER30 UZ	235 / 60 R 16	100	Y	7	688	240	313	2098		
	ER30 YZ	235 / 60 R 16	100	H	7	688	240	313	2098		
55 Series	ER30 UZ	195 / 55 R 16	87	V	6	620	201	287	1891		
	ER30 UZ	205 / 55 R 16	91	V/W	6 1/2	632	214	291	1928		
	ER30 PZ	205 / 55 R 16	91	H/V	6 1/2	632	214	291	1928		
	ER30 YZ	205 / 55 R 16	91	H/V	6 1/2	632	214	291	1928		
	ER30 1Z	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30 PZ	205 / 55 R 16	94 XL	V	6 1/2	632	214	291	1928		
	ER30 5Z	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30 XZ	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30 AZ	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30 EZ	205 / 55 R 16	91	V	6 1/2	632	214	291	1928		
	ER30 UZ	215 / 55 R 16	93	H/V/W	7	642	226	295	1958		
	ER30 UZ	215 / 55 R 16	97 XL	V	7	642	226	295	1958		
	ER30 UZ	235 / 55 R 17	99	Y	7 1/2	690	245	317	2105		

XL = extra load

Rolling Circumference ± 2%

# TURANZA ER30



50 Series	ER30 UZ	195 / 50 R 15	82	H/V	6	577	201	267	1760		
	ER30 AZ	195 / 50 R 15	82	V	6	577	201	267	1760		
	ER30 UZ	225 / 50 ZR 16	92	W	7	632	233	291	1928		
	ER30 YZ	225 / 50 R 16	92	V	7	632	233	291	1928		
	ER30 XZ	245 / 50 R 18	100	W	7 1/2	703	253	324	2144		
45 Series	ER30 AZ	205 / 45 R 16	83	W	7	590	206	275	1800		
	ER30 UZ	205 / 45 R 16	83	W	7	590	206	275	1800		
	ER30	205 / 45 R 16	83	W	7	590	206	275	1800		
	ER30 KZ	205 / 45 R 16	83	H	7	590	206	275	1800		
	ER30 UZ	215 / 45 R 17	87	W	7	626	213	292	1909		
	ER30 UZ	225 / 45 R 17	91	W	7 1/2	634	225	295	1934		

Rolling Circumference ± 2%

# B250



**Tyre with good balance between comfort, balance and mileage**

**Designed to fulfil requirements of both OEM & replacement**

70 Series	B250	155/70	R 13	75	T	4 1/2	548	157	250	1671	
	B250	165/70	R 13	79	T	5	562	170	256	1714	
	B250	165/70	R 14	81	T	5	588	170	268	1793	
	B250 CZ	165/70	R 14	81	S	5	588	170	268	1793	
	B250 BZ	165/70	R 14	81	S	5	588	170	268	1793	
	B250	175/70	R 13	82	T	5	576	177	261	1757	
	B250	175/70	R 14	84	H/T	5	602	177	274	1836	
65 Series	B250	155/65	R 13	73	T	4 1/2	532	157	244	1623	
	B250	155/65	R 14	75	T	4 1/2	558	157	257	1702	
	B250	165/65	R 13	77	T	5	544	170	248	1659	
	B250	165/65	R 14	79	T	5	570	170	261	1739	
	B250	165/65	R 15	81	T	5	595	170	274	1815	
	B250	175/65	R 13	80	T	5	558	177	254	1702	
	B250	175/65	R 14	82	T	5	584	177	267	1781	
	B250	175/65	R 15	84	T	5	609	177	279	1857	
	B250	185/65	R 14	86	H/T	5 1/2	596	189	272	1818	
	B250	185/65	R 15	88	H/T	5 1/2	621	189	284	1894	
60 Series	B250	195/65	R 15	91	H/T	6	635	201	290	1937	
	B250	185/60	R 14	82	T	5 1/2	578	189	265	1763	
	B250 CZ	185/60	R 15	84	H	5 1/2	603	189	277	1839	
	B250 BZ	185/60	R 15	84	H	5 1/2	603	189	277	1839	

Rolling Circumference ± 2%



# Passenger Summer Replacement

PSR

# POTENZA S-03 Pole Position



The Potenza S-03 Pole Position, ultra-high performance road tyre. Excellent grip and handling on dry, from accelerating/ braking until sharp cornering, will ensure the satisfaction and fun for today's sporty drivers with their cars. Additional, unique technologies reduce even further, the risk of aquaplaning and therefore increase the safety of drivers and their passengers.

50 Series	ES03 PZ	205/50 ZR 16	87	W	6 1/2	612	214	283	1867	
45 Series	ES03 PZ	215/45 R 17	87	Y	7	626	213	292	1909	
	ES03 PZ	225/45 ZR 16	89	Y	7 1/2	608	225	282	1854	
	ES03 PZ	245/45 R 18	96	Y	8	677	243	314	2065	
40 Series	ES03 PZ	245/40 R 19	98 RFD	Y	8 1/2	679	248	318	2071	
	ES03 PZ	255/40 R 19	96	Y	9	687	260	321	2095	
	ES03 PZ	265/40 ZR 17	96	Y	9 1/2	644	271	299	1964	
35 Series	ES03 PZ	225/35 R 18	87 RFD	Y	8	615	230	290	1876	
	ES03 PZ	235/35 ZR 19	91 RFD	Y	8 1/2	647	241	305	1973	
	ES03 PZ	245/35 R 19	93 RFD	Y	8 1/2	655	248	309	1998	

RFD = Reinforced

Rolling Circumference ± 2%



# POTENZA RE720

The Potenza RE720 targets the high performance sports zone. Emphasis is on class-leading wet performance such as braking and cornering as well as maximum hydroplaning resistance. RE720's appeal to sporty drivers is further ensured by superb dry grip and sharp, responsive handling. The unique tread pattern design, sidewall decoration and rim guard are intended to complement the look and image of target cars.



65 Series	E720 FZ	205/60	R 15	91	V	6	627	209	286	1912	
55 Series	E720 FZ	185/55	R 14	80	H	6	560	194	258	1708	
	E720 FZ	195/55	R 15	85	V	6	595	201	274	1815	
	E720 FZ	205/55	R 15	88	V	6 1/2	607	214	279	1851	
	E720 FZ	205/55	R 16	91	V	6 1/2	632	214	291	1928	
50 Series	E720 FZ	195/50	R 15	82	H/V	6	577	201	267	1760	
	E720 FZ	205/50	R 15	86	H	6 1/2	587	214	271	1790	

Rolling Circumference ± 2%



# B330 EVO

The B330 Evo general-use tyre upgrades the successful B330 with a new carcass construction and tread compound.

Comfort and handling is optimised with an improved sidewall contour and tuned-up bead construction, while the new tread compound improves wet grip and extends tyre wear significantly.

80 Series	B330EVO	135/80 R 13	70	T	3 1/2	546	133	249	1665	
	B330EVO	145/80 R 13	75	T	4	562	145	256	1714	
	B330EVO	155/80 R 13	79	T	4 1/2	578	157	262	1763	
	B330EVO	165/80 R 13	83	T	4 1/2	594	165	268	1812	
70 Series	B330EVO	145/70 R 13	71	T	4 1/2	534	150	245	1629	
	B330EVO	185/70 R 13	86	T	5 1/2	590	189	266	1800	
	B330EVO	185/70 R 14	88	T	5 1/2	616	189	279	1879	
65 Series	B330EVO	195/65 R 14	89	T	6	610	201	277	1861	
	B330EVO	215/65 R 15	96	T	6 1/2	661	221	300	2016	
60 Series	B330EVO	195/60 R 15	88	T	6	615	201	282	1876	

Rolling Circumference ± 2%



# B330

80 Series	B330 CZ	175/80 R 14	88	T	5	636	177	287	1940	
70 Series	B330 Z	195/70 R 14	91	T	6	630	201	285	1922	
	B330 Z	195/70 R 15	97 RFD	T	6	655	201	297	1998	
65 Series	B330 CZ	195/65 R 15	95 RFD	T	6	635	201	290	1937	

RFD = Reinforced

Rolling Circumference ± 2%



# Passenger Summer OE

# POTENZA RE050



The tyre for the sporty, demanding driver in wet and dry conditions. Suitable for a wide range of models from super sport cars to popular models like the Golf. It offers high performance with a good level of comfort and low noise. In certain sizes it is available in run flat.



50 Series	E050 Z	205/50 R 16	87	V	6 1/2	612	214	283	1867	
	E050 BZ*	225/50 R 16	92	V	7	632	233	291	1928	
	E050 I*	225/50 R 16	92	V/W	7	632	233	291	1928	
	E050 EZ*	225/50 R 17	94	W/Y	7	658	233	304	2007	
	E050*	225/50 R 17	94	W	7	658	233	304	2007	
	E050*	245/50 R 17	99	W	7 1/2	678	253	312	2068	
45 Series	E050 EZ	215/45 R 17	87	W	7	626	213	292	1909	
	E050 EZ	215/45 R 17	91 RFD	W	7	626	213	292	1909	
	E050 GZ	215/45 R 17	87	W	7	626	213	292	1909	
	E050 MZ	215/45 R 17	87	W	7	626	213	292	1909	
	E050	215/45 R 17	91 XL	V	7	626	213	292	1909	
	E050 LZ***	215/45 R 17	87	V	7	626	213	292	1909	
	E050 PZ	215/45 R 17	87	V	7	626	213	292	1909	
	E050 Z	215/45 R 17	87	W	7	626	213	292	1909	
	E050	215/45 R 17	87	W	7	626	213	292	1909	
	E050 BZ	225/45 R 17	91	W/Y	7 1/2	634	225	295	1934	
	E050 AZ	225/45 ZR 17	91	Y	7 1/2	634	225	295	1934	
	E050 TZ***	225/45 R 17	91	W	7 1/2	634	225	295	1934	
	E050	225/45 R 17	91	W/Y	7 1/2	634	225	295	1934	
	E050**	225/45 R 17	94 XL	Y	7 1/2	634	225	295	1934	
	E050 EZ	225/45 R 17	90	W	7 1/2	634	225	295	1934	
	E050**	235/45 R 17	94	Y	8	644	236	299	1964	
	E050 Z*	245/45 R 17	95	W	8	652	243	302	1989	
	E050 DZ*	245/45 R 17	95	W/Y	8	652	243	302	1989	
E050 AZ	245/45 R 17	95	W	8	652	243	302	1989		
E050**	245/45 R 17	95	Y	8	652	243	302	1989		

XL = extra load

RFD = Reinforced

\*RFT: Run Flat Tyre

\*\*Both available in RFT and non RFT version

\*\*\*Extended tyres

Rolling Circumference ± 2%



# POTENZA RE050



E050 EZ	245/45	R 17	95	W	8	652	243	302	1989	
E050 AZ	245/45	R 18	96	Y	8	677	243	314	2065	
E050 PZ	245/45	R 18	96	Y	8	677	243	314	2065	
E050 AZ	245/45	R 18	100 XL	Y	8	677	243	314	2065	
E050 CZ*	245/45	R 18	100 XL	H	8	677	243	314	2065	
E050 EZ*	245/45	R 18	96	Y	8	677	243	314	2065	
E050 JZ***	245/45	R 18	96	Y	8	677	243	314	2065	
E050	255/45	R 18	99	Y	8 1/2	687	255	318	2095	
E050***	255/45	R 18	99	Y	8 1/2	687	255	318	2095	
E050	275/45	R 18	103	Y	9	705	273	325	2150	
E050***	275/45	R 18	103	Y	9	705	273	325	2150	
40 Series										
E050 BZ	245/40	R 17	91	W/Y	8 1/2	628	248	292	1915	
E050 MZ	245/40	R 17	91	W	8 1/2	628	248	292	1915	
E050 TZ***	245/40	R 17	91	W	8 1/2	628	248	292	1915	
E050***	245/40	R 17	95 XL	Y	8 1/2	628	248	292	1915	
E050 CZ	245/40	R 18	97 XL	Y	8 1/2	653	248	305	1992	
E050	245/40	ZR 18			8 1/2	653	248	305	1992	
E050	255/40	R 19	96	Y	9	687	260	321	2095	
E050	255/40	ZR 19	XL		9	687	260	321	2095	
E050 AZ	265/40	R 18	101 XL	Y	9 1/2	669	271	311	2040	
E050 PZ	265/40	R 18	97	Y	9 1/2	669	271	311	2040	
E050 JZ***	265/40	R 18	97	Y	9 1/2	669	271	311	2040	
E050 AZ	275/40	R 18	99	Y	9 1/2	677	278	314	2065	
E050	275/40	R 19	101	Y	9 1/2	703	278	327	2144	
E050	275/40	ZR 19	XL		9 1/2	703	278	327	2144	
E050 AZ*	285/40	R 18	101	Y	10	685	290	317	2089	
35 Series										
E050	265/35	ZR 18	XL		9 1/2	643	271	301	1961	

XL = extra load

\*RFT: Run Flat Tyre

\*\*\*Extended tyres

Rolling Circumference ± 2%


# POTENZA RE040



Proven as Original Equipment for leading high performance cars, such as Audi A8, Phaeton, TT. The Potenza RE040 is now available on the replacement market. Specially suitable for the comfort oriented sports cars it delivers enhanced wet and dry performance without sacrificing good ride comfort and low pattern noise.

60 Series	E040 BZ	235/60 R 16	100	W	7	688	240	313	2098	
55 Series	E040 BZ	175/55 R 16	80	W	6	620	201	287	1891	
	E040 BZ	175/55 R 17	81	W	5 1/2	624	182	291	1903	
	E040 DZ	185/55 R 15	82	V	6	585	194	270	1784	
	E040 AZ	185/55 R 15	81	V	6	585	194	270	1784	
	E040 AZ	185/55 R 15	82	V	6	585	194	270	1784	
	E040	205/55 R 16	91	V/W	6 1/2	632	214	291	1928	
	E040 DZ	225/55 R 16	95	V	7	654	233	300	1995	
	E040 BZ	235/55 R 17	99	Y	7 1/2	690	245	317	2105	
50 Series	E040 KZ	165/50 R 15	73	V	5	547	170	255	1668	
	E040 Z	205/50 R 15	85	V	6 1/2	587	214	271	1790	
	E040 GZ	205/50 R 17	89	V	6 1/2	638	214	296	1946	
	E040 XZ	205/50 R 17	89	V	6 1/2	638	214	296	1946	
	E040 BZ	235/50 R 18	101 XL	Y	7 1/2	693	245	321	2114	
45 Series	E040 Z	215/45 R 16	86	W	7	600	213	279	1830	
	E040 AZ	205/45 R 17	84	W	7	616	206	288	1879	
	E040 CZ	215/45 R 17		Z	7	626	213	292	1909	
	E040 AZ	215/45 R 17	87	W	7	626	213	292	1909	
	E040 BZ	225/45 R 17	91	W/Y	7 1/2	634	225	295	1934	
	E040 CZ	225/45 R 17		Z	7 1/2	634	225	295	1934	
	E040 CZ	225/45 ZR 17		Z	7 1/2	634	225	295	1934	
	E040 JZ	225/45 R 17	90	W	7 1/2	634	225	295	1934	
	E040 BZ	225/45 R 17	90	W	7 1/2	634	225	295	1934	
	E040 BZ	225/45 R 17	94 XL	W	7 1/2	634	225	295	1934	
	E040 BZ	225/45 R 17	91	W/Y	7 1/2	634	225	295	1934	
	E040 CZ	225/45 R 18	91	W	7 1/2	659	225	307	2010	

XL = extra load

\*RFT: Run Flat Tyre 

Rolling Circumference ± 2%

# POTENZA RE040



	E040 EZ	225/45	R 18	95 XL	Y	7 1/2	659	225	307	2010
	E040 XZ	225/45	R 18	91	W	7 1/2	659	225	307	2010
	E040 RZ	225/45	R 18	91	W	7 1/2	659	225	307	2010
	E040 SZ*	245/45	R 18	96	W	8	677	243	314	2065
	E040 KZ	245/45	R 18	96	W	8	677	243	314	2065
	E040 EZ	245/45	ZR 18	96	Y	8	677	243	314	2065
	E040 CZ	255/45	R 18	103 XL	Y	8 1/2	687	255	318	2095
	E040 GZ	255/45	R 18	99	Y	8 1/2	687	255	318	2095
40 Series	E040 Z	205/40	R 17	80	W	7 1/2	596	212	280	1818
	E040 Z	215/40	R 17	83	Y	7 1/2	604	218	283	1842
	E040 Z	225/40	R 18	88	Y	8	637	230	299	1943
	E040 YZ	235/40	R 18		Z	8 1/2	645	241	302	1967
	E040 NZ*	245/40	R 18		Z	8 1/2	653	248	305	1992
	E040 DZ	255/40	R 17	94	Y	9	636	260	296	1940
	E040 BZ	255/40	R 19	100 XL	Y	9	687	260	321	2095
	E040 SZ*	275/40	R 18	99	W	9 1/2	677	278	314	2065
35 Series	E040 Z	255/35	R 18	90	Y	9	635	260	298	1937

XL = extra load

\*RFT: Run Flat Tyre

Rolling Circumference ± 2%



# POTENZA RE030

For Honda Civic, Subaru Legacy, Toyota XRV and Lexus GS300-400

55 Series	E030 MZ	165/55 R 14	72	V	5	538	170	249	1641	
	E030 LZ	175/55 R 15	77	V	5 1/2	573	182	265	1748	
	E030 Z	205/55 R 16	89	V	6 1/2	632	214	291	1928	
	E030 AZ	205/55 R 16	89	V	6 1/2	632	214	291	1928	
	E030 KZ	205/55 R 16	89	W	6 1/2	632	214	291	1928	
	E030 QZ	205/55 R 16	89	W	6 1/2	632	214	291	1928	
45 Series	E030 AZ	235/45 ZR 17		Z	8	644	236	299	1964	

Rolling Circumference ± 2%

# POTENZA RE031

For Lexus RX 300

60 Series	E031 Z	225/60 R 17	99	V	6 1/2	702	228	321	2141	
55 Series	E031 Z	235/55 R 18	99	V	7 1/2	715	245	329	2181	
	E031 AZ	235/55 R 18	99	V	7 1/2	715	245	329	2181	

Rolling Circumference ± 2%



# POTENZA RE010



For Honda Accord, Integra

55 Series	E010 Z	195 / 55	R 15	85	W	6	595	201	274	1815
50 Series	E010L Z	205 / 50	R 15	86	Y	6 1/2	587	214	271	1790
	E010R Z	205 / 50	R 15	86	Y	6 1/2	587	214	271	1790
	E010 Z	205 / 50	R 16	87	V	6 1/2	612	214	283	1867
	E010 Z	215 / 50	R 16	90	W	7	622	226	287	1897
	E010L Z	225 / 50	R 16	92	Y	7	632	233	291	1928
	E010R Z	225 / 50	R 16	92	Y	7	632	233	291	1928
45 Series	E010 AZ	215 / 45	R 17	87	W	7	626	213	292	1909

L: Left - R: Right

Rolling Circumference ± 2%

# POTENZA RE71 (71G)



For Porsche

60 Series	E71GL Z	175 / 60	R14L	79	H	5	566	177	260	1726
45 Series	E71G Z*	235 / 45	ZR 17			8	644	236	299	1964
40 Series	E71G Z*	255 / 40	ZR 17			9	636	260	296	1940

\*RFT: Run Flat Tyre

Rolling Circumference ± 2%



# POTENZA RE88

For Honda Civic, Accord, Mitsubishi Galant, Carisma.....

65 Series	E88 TZ	185 / 65 R 14	86	H	5 1/2	596	189	272	1818	
	E88 NZ	195 / 65 R 14	89	V	6	610	201	277	1861	
60 Series	E88 AZ	175 / 60 R 14	79	H	5	566	177	260	1726	
	E88 NZ	195 / 60 R 15	88	H/V	6	615	201	282	1876	
	E88 BZ	195 / 60 R 15	88	H	6	615	201	282	1876	
	E88 EZ	195 / 60 R 15	88	H	6	615	201	282	1876	
	E88 DZ	195 / 60 R 15	88	V	6	615	201	282	1876	

Rolling Circumference ± 2%

# POTENZA RE070











Sport tyre for Subaru Impreza

45 Series	E070 CZ	225 / 45 R 17	90	W	7 1/2	634	225	295	1934	

Rolling Circumference ± 2%

# POTENZA RE080

For Subaru Legacy and Kia Cerato











										
65 Series	E080 Z	195/65	R 15	91	V	6	635	201	290	1937
60 Series	E080 BZ	185/60	R 15	84	H	5 1/2	603	189	277	1839
	E080 EZ	195/60	R 15	88	H	6	615	201	282	1876

Rolling Circumference ± 2%

# POTENZA S-02A

The S-02A offers uncompromising performance for drivers of the world's most powerful sports cars, confirmed by OEMs such as Porsche and Ferrari.



										
50 Series	ES2A Z	205/50	ZR 17		Z	6 1/2	638	214	296	1946
45 Series	ES2A DZ	215/45	R 18	89	Y	7	651	213	304	1986
40 Series	ES2A BZ	255/40	ZR 17		Z	9	636	260	296	1940
	ES2A FZ	225/40	R 18		Z	8	637	230	299	1943
	ES2A DZ	275/40	R 18	99	Y	9 1/2	677	278	314	2065
35 Series	ES2A JZ	265/35	R 18		Z	9 1/2	643	271	301	1961
30 Series	ES2A FZ	285/30	R 18		Z	10	629	290	296	1918
	ES2A FZ	295/30	R 18	XL	Z	10 1/2	635	301	298	1937

XL = extra load

Rolling Circumference ± 2%

# POTENZA S-02 Pole Position



The S-02PP offers uncompromising performance for drivers of the world's most powerful sports cars, confirmed by OEMs such as Porsche and Ferrari.

55 Series	ES02J JZ	205 / 55 R 16	89	W	6 1/2	632	214	291	1928	
50 Series	ES02J JZ	225 / 50 R 16	92	W	7	632	233	291	1928	
40 Series	ES02 PZ	255 / 40 ZR 19			9	687	260	321	2095	

Rolling Circumference ± 2%

# POTENZA S-02



55 Series	S02 JZ	205/55 ZR 16		Z	6 1/2	632	214	291	1928
50 Series	S02 JZ	225/50 ZR 16		Z	7	632	233	291	1928
	S02 KZ	205/50 ZR 17		Z	6 1/2	638	214	296	1946
45 Series	S02 JZ	245/45 ZR 16		Z	8	626	243	289	1909
	S02 FZ	225/45 ZR 17		Z	7 1/2	634	225	295	1934
	S02 KZ	225/45 ZR 17		Z	7 1/2	634	225	295	1934
40 Series	S02 KZ	255/40 ZR 17		Z	9	636	260	296	1940
	S02 FZ	225/40 ZR 18		Z	8	637	230	299	1943
	S02 JZ	225/40 ZR 18		Z	8	637	230	299	1943
	S02 EZ	235/40 ZR 18	91	Y	8 1/2	645	241	302	1967
	S02 LZ	245/40 R 18	93	Y	8 1/2	653	248	305	1992
35 Series	S02 FZ	265/35 ZR 18		Z	9 1/2	643	271	301	1961
	S02 EZ	265/35 ZR 18	93	Y	9 1/2	643	271	301	1961
30 Series	S02 FZ	285/30 ZR 18		Z	10	629	290	296	1918

Rolling Circumference ± 2%

# POTENZA RE011



55 Series	E011 Z	215/45 R 17	87	W	7	626	213	292	1909

Rolling Circumference  $\pm$  2%

# EXPEDIA S-01

Excellent grip and handling on dry, from accelerating / braking until sharp cornering, will ensure the satisfaction and fun for today's sporty drivers with their cars. Additional, unique technologies reduce even further, the risk of aquaplaning and therefore increase the safety of drivers and their passengers.



50 Series	S01L Z	205/50 ZR 17		Z	6 1/2	638	214	296	1946	
	S01R Z	205/50 ZR 17		Z	6 1/2	638	214	296	1946	
	S01 VZ	225/50 ZR 16		Z	7	632	233	291	1928	
	S01 TZ	215/50 ZR 17		Z	7	648	226	300	1976	
45 Series	S01 MZ	225/45 ZR 17	93	W	7 1/2	634	225	295	1934	
	S01 VZ	245/45 ZR 16		Z	8	626	243	289	1909	
	S01 JZ	255/45 ZR 17	98	Y	8 1/2	662	255	306	2019	
	S01L JZ	255/45 ZR 17		Z	8 1/2	662	255	306	2019	
	S01R JZ	255/45 ZR 17		Z	8 1/2	662	255	306	2019	
40 Series	S01 FZ	225/40 ZR 18		Z	8	637	230	299	1943	
	S01 FZ	235/40 ZR 17		Z	8 1/2	620	241	289	1891	
	S01L Z	255/40 ZR 17		Z	9	636	260	296	1940	
	S01R Z	255/40 ZR 17		Z	9	636	260	296	1940	
	S01L FZ	265/40 ZR 18		Z	9 1/2	669	271	311	2040	
	S01R FZ	265/40 ZR 18		Z	9 1/2	669	271	311	2040	
35 Series	S01 JZ	285/40 ZR 17	100	Y	10	660	290	305	2013	
	S01 Z	275/35 ZR 17		Z	9 1/2	624	278	291	1903	
	S01 FZ	335/35 ZR 17		Z	12	666	343	307	2031	

L: Left - R: Right

Rolling Circumference ± 2%



# TURANZA ER31

For Opel Vectra.



65 Series	ER31	195 / 65	R 15	91	H/V	6	635	201	290	1937
55 Series	ER31 AZ*	205 / 55	R 16	91	V	6 1/2	632	214	291	1928
	ER31*	205 / 55	R 16	91	H	6 1/2	632	214	291	1928

\*RFT: Run Flat Tyre 

Rolling Circumference  $\pm$  2%



# TURANZA ER33

For Nissan Maxima and Lexus LS 430



55 Series	ER33 DZ	215 / 55	R 17	93	V	7	668	226	308	2037
	ER33 JZ	215 / 55	R 17	93	V	7	668	226	308	2037
45 Series	ER33 DZ	245 / 45	R 18	96	W	8	677	243	314	2065
	ER33 JZ	245 / 45	R 18	96	W	8	677	243	314	2065

Rolling Circumference  $\pm$  2%



# TURANZA ER42



For BMW 7 series

50 Series	ER42 Z*	245/50 R 18	100	W	7 1/2	703	253	324	2144

\*RFT: Run Flat Tyre

Rolling Circumference  $\pm$  2%

# TURANZA EL42



For BMW 7 series and X5.

55 Series	EL42*	205/55 R 16	91	H/V	6 1/2	632	214	291	1928
	EL42	225/55 R 16	95	H	7	654	233	300	1995
	EL42 DZ	245/50 R 18	100	V	7 1/2	703	253	324	2144
	EL42 Z*	245/50 R 18	100	V	7 1/2	703	253	324	2144
	EL42*	225/45 R 17	91	H/V	7 1/2	634	225	295	1934

\*RFT: Run Flat Tyre

Rolling Circumference  $\pm$  2%

Passenger Summer



# REGNO GR01

65 Series GR01		145 / 65 R 13	69	S	4 1/2	518	150	238	1580

Rolling Circumference  $\pm$  2%

Passenger Summer



# REGNO GR03

For Nissan

65 Series G03 Z		175 / 65 R 14	82	H	5	584	177	267	1781

Rolling Circumference  $\pm$  2%

# B340



For Smart Fortwo and Roadster

Smart Tyre

65 Series B340 EZ	145/65	R 15	72	T	4 1/2	569	150	264	1735	
55 Series B340 GZ	175/55	R 15	77	T	5 1/2	573	182	265	1748	
B340	185/55	R 15	82	T	6	585	194	270	1784	
50 Series B340	195/50	R 15	82	T	6	577	201	267	1760	
45 Series B340	205/45	R 16	83	H	7	590	206	275	1800	

Rolling Circumference ± 2%

# B360



Tyre for Daewoo, Lanos and other.

65 Series B360 Z	185/65	R 14	86	H	5 1/2	596	189	272	1818	

Rolling Circumference ± 2%

Passenger Summer



# B371

Tyre for Nissan Micra and Suzuki Wagon R

60 Series	B371 Z	165/60 R 14	75	H/T	5	554	170	255	1690

Rolling Circumference  $\pm$  2%

Passenger Summer



# B381

Tyre for Audi A2, VW Lupo











80 Series	B381 KZ	145/80 R 14	76	T	4	588	145	268	1793
65 Series	B381 LZ	155/65 R 14	75	T	4 1/2	558	157	257	1702

Rolling Circumference  $\pm$  2%

# B390

Tyre for OE fitment of Mazda 323, Seat Leon, Fiat Multipla, Renault Megane, Honda HRV, Ford Fusion, Toyota Corolla, Honda Civic, VW Golf and Touran, etc....



											
70 Series	B390 Z	145 / 70	R 12	69	S	4 1/2	509	150	232	1552	
	B390 VZ	195 / 70	R 15	92	S	6	655	201	297	1998	
65 Series	B390 MZ	185 / 65	R 14	86	H	5 1/2	596	189	272	1818	
	B390 BZ	195 / 65	R 15	91	H	6	635	201	290	1937	
	B390 JZ	195 / 65	R 15	91	H/T/V	6	635	201	290	1937	
	B390 PZ	195 / 65	R 15	91	T	6	635	201	290	1937	
	B390 PZ	195 / 65	R 15	95 RFD	T	6	635	201	290	1937	
	B390 UZ	195 / 65	R 15	91	H/T	6	635	201	290	1937	
	B390	195 / 65	R 15	95 XL	H	6	635	201	290	1937	
	B390 RZ	205 / 65	R 15	94	T	6	647	209	294	1973	
60 Series	B390 KZ	195 / 60	R 15	88	V	6	615	201	282	1876	
	B390	195 / 60	R 15	88	H/T	6	615	201	282	1876	
	B390 VZ	195 / 60	R 15	88	H	6	615	201	282	1876	

XL = extra load  
RFD = Reinforced

Rolling Circumference ± 2%

# B391



Tyre for Toyota Yaris, Corolla, Nissan Micra, Almera, Honda Civic, Ford Fiesta, Lancia Y, Mazda 323, etc...

80 Series	B391 DZ	155/80	R 13	79	T	4 1/2	578	157	262	1763	
	B391 GZ	155/80	R 13	79	T	4 1/2	578	157	262	1763	
70 Series	B391	165/70	R 14	81	T	5	588	170	268	1793	
	B391 TZ	175/70	R 14	84	H	5	602	177	274	1836	
	B391 TZ	175/70	R 14	88 RFD	T	5	602	177	274	1836	
	B391 Z	185/70	R 14	88	H	5 1/2	616	189	279	1879	
	B391 EZ	185/70	R 14	88	H	5 1/2	616	189	279	1879	
65 Series	B391 Z	165/65	R 14	79	T	5	570	170	261	1739	
	B391 MZ	165/65	R 14	79	S	5	570	170	261	1739	
	B391 GZ	175/65	R 14	82	T	5	584	177	267	1781	
	B391 LZ	175/65	R 14	82	H/T	5	584	177	267	1781	
	B391 1Z	175/65	R 14	82	T	5	584	177	267	1781	
	B391 BZ	175/65	R 14	82	T	5	584	177	267	1781	
	B391	175/65	R 15	84	T	5	609	177	279	1857	
	B391 BZ	185/65	R 14	86	H/T	5 1/2	596	189	272	1818	
	B391 LZ	185/65	R 14	86	T	5 1/2	596	189	272	1818	
	B391	185/65	R 14	86	T	5 1/2	596	189	272	1818	
60 Series	B391 BZ	185/65	R 15	88	H	5 1/2	621	189	284	1894	
	B391 AZ	185/65	R 15	88	H	5 1/2	621	189	284	1894	
	B391	165/60	R 14	75	T	5	554	170	255	1690	

RFD = Reinforced

Rolling Circumference ± 2%

# SF 226



Tyre for Nissan Serena

70 Series	S226 GZ	195 / 70	R 14	95 RFD	S	6	630	201	285	1922

RFD = Reinforced

Rolling Circumference  $\pm$  2%

# SF 237



Tyre for Subaru Impreza and Toyota Camry.

70 Series	S237 Z	185 / 70	R 14	88	H	5 1/2	616	189	279	1879

Rolling Circumference  $\pm$  2%



# SF 321

For Toyota Previa.

65 Series	S321 KZ	215/65 R 15	96	H	6 1/2	661	221	300	2016

Rolling Circumference ± 2%



# SF 322

65 Series	S322 Z	165/65 R 13	77	S	5	544	170	248	1659
	S322	165/65 R 13	77	T	5	544	170	248	1659

Rolling Circumference ± 2%



# SF 381



Tyre for Mitsubishi Spacegea.

82 Series	S381 AZ	195/82	R 14	98 RFD	S	5 1/2	666	198	299	2031

RFD = Reinforced

Rolling Circumference ± 2%





## Passenger Winter

# BLIZZAK LM20



Tyre designed with snow simulation technology that measures steering force distribution to the nearest millimetre combined with a new high silica compound and still pattern construction, it gives a well-balanced all round performance on snow, ice, wet and dry.



70 Series	LM20	155 / 70 R 13	75	T	4 1/2	548	157	250	1671		
	LM20	165 / 70 R 13	79	T	5	562	170	256	1714		
	LM20	165 / 70 R 14	81	T	5	588	170	268	1793		
	LM20	175 / 70 R 13	82	T	5	576	177	261	1757		
	LM20	175 / 70 R 14	84	T	5	602	177	274	1836		
	LM20	185 / 70 R 14	88	T	5 1/2	616	189	279	1879		
	LM20	195 / 70 R 14	91	T	6	630	201	285	1922		
65 Series	LM20 Z	155 / 65 R 14	75	T	4 1/2	558	157	257	1702		
	LM20 Z	165 / 65 R 14	79	T	5	570	170	261	1739		
	LM20 Z	165 / 65 R 15	81	T	5	595	170	274	1815		
	LM20 Z	175 / 65 R 13	80	T	5	558	177	254	1702		
	LM20 Z	175 / 65 R 14	82	T	5	584	177	267	1781		
	LM20 Z	185 / 65 R 14	86	T	5 1/2	596	189	272	1818		
	LM20 Z	185 / 65 R 15	88	T	5 1/2	621	189	284	1894		
60 Series	LM20	165 / 60 R 14	75	T	5	554	170	255	1690		
	LM20	185 / 60 R 14	82	T	5 1/2	578	189	265	1763		
	LM20 Z	195 / 60 R 15	88	T	6	615	201	282	1876		
55 Series	LM20	185 / 55 R 14	80	T	6	560	194	258	1708		

Rolling Circumference ± 2%

# BLIZZAK LM-25

Designed with Bridgestone's latest simulation technology to give more powerful cars high-level balanced performance on frozen surfaces, wet and dry, all with an absolute minimum of noise.



65 Series	LM25 Z	195 /65	R 15	91	H/T	6	635	201	290	1937	
	LM25 Z	195 /65	R 15	95 XL	T	6	635	201	290	1937	
	LM25	195 /65	R 15	91	H	6	635	201	290	1937	
	LM25 Z	205 /65	R 15	94	H/T	6	647	209	294	1973	
	LM25 Z	215 /65	R 15	96	H	6 1/2	661	221	300	2016	
60 Series	LM25 Z	205 /60	R 15	91	H/T	6	627	209	286	1912	
	LM25	225 /60	R 15	96	H	6 1/2	651	228	296	1986	
	LM25	195 /60	R 16	89	H	6	640	201	294	1952	
	LM25 Z	205 /60	R 16	92	H	6	652	209	299	1989	
	LM25	225 /60	R 16	98	H	6 1/2	676	228	308	2062	
55 Series	LM25	185 /55	R 15	82	H/T	6	585	194	270	1784	
	LM25	195 /55	R 15	85	H	6	595	201	274	1815	
	LM25 Z	195 /55	R 16	87	H/T	6	620	201	287	1891	
	LM25*	195 /55	R 16	87	H	6	620	201	287	1891	
	LM25 Z	205 /55	R 16	91	H/T	6 1/2	632	214	291	1928	
	LM25 VZ	205 /55	R 16	94 XL	V	6 1/2	632	214	291	1928	
	LM25	205 /55	R 16	91	H	6 1/2	632	214	291	1928	
	LM25 Z	215 /55	R 16	93	H	7	642	226	295	1958	
	LM25 Z	215 /55	R 16	97 XL	H	7	642	226	295	1958	
	LM25 VZ	215 /55	R 16	97 XL	V	7	642	226	295	1958	
	LM25 VZ	225 /55	R 16	99 XL	V	7	654	233	300	1995	
	LM25	225 /55	R 16	95	H	7	654	233	300	1995	

XL = extra load

\*RFT: Run Flat Tyre

Rolling Circumference ± 2%

# BLIZZAK LM-25



50 Series	LM25 Z	195 / 50	R 15	82	H/T	6	577	201	267	1760	
	LM25	195 / 50	R 16	84	H	6	602	201	279	1836	
	LM25	205 / 50	R 16	87	H	6 1/2	612	214	283	1867	
	LM25 Z	205 / 50	R 17	89	H	6 1/2	638	214	296	1946	
	LM25 VZ	205 / 50	R 17	93 XL	V	6 1/2	638	214	296	1946	
	LM25 VZ	225 / 50	R 17	98 XL	V	7	658	233	304	2007	
	LM25 BZ*	245 / 50	R 17	99	H	7 1/2	678	253	312	2068	
45 Series	LM25	205 / 45	R 16	83	H	7	590	206	275	1800	
	LM25 Z	215 / 45	R 17	87	H	7	626	213	292	1909	
	LM25 Z	215 / 45	R 17	91 XL	H	7	626	213	292	1909	
	LM25 Z	225 / 45	R 17	91	H	7 1/2	634	225	295	1934	
	LM25 VZ	225 / 45	R 17	94 XL	V	7 1/2	634	225	295	1934	
	LM25 BZ*	225 / 45	R 17	94 XL	V	7 1/2	634	225	295	1934	
	LM25 BZ*	225 / 45	R 17	91	H	7 1/2	634	225	295	1934	
	LM25 HZ*	225 / 45	R 17	94 XL	H	7 1/2	634	225	295	1934	
	LM25 VZ	225 / 45	R 18	95 XL	V	7 1/2	659	225	307	2010	
	LM25 Z	235 / 45	R 17	94	H	8	644	236	299	1964	
	LM25 VZ	235 / 45	R 17	97 XL	V	8	644	236	299	1964	
	LM25 VZ	245 / 45	R 17	99 XL	V	8	652	243	302	1989	
	40 Series	LM25*	245 / 45	R 17	99 XL	V	8	652	243	302	1989
LM25 BZ*		245 / 45	R 18	96	V	8	677	243	314	2065	
LM25 VZ		225 / 40	R 18	92 XL	V	8	637	230	299	1943	
LM25 VZ		235 / 40	R 18	95 XL	V	8 1/2	645	241	302	1967	
LM25 VZ		255 / 40	R 17	98 XL	V	9	636	260	296	1940	
35 Series	LM25***	255 / 40	R 18	99 XL	V	9	661	260	308	2016	
	LM25 VZ	255 / 35	R 18	94 XL	V	9	635	260	298	1937	
	LM25 VZ	265 / 35	R 18	97 XL	V	9 1/2	643	271	301	1961	

XL = extra load  
 \*RFT: Run Flat Tyre  
 \*\*\*Extended tyre



Rolling Circumference ± 2%

# BLIZZAK LM18

Designed and manufactured with Bridgestone's advanced technology, and enhanced with tread-pattern design and materials, the Blizzak LM-18 gives motorists unbeatable performance in both winter and wet/dry conditions.



80 Series	LM18 Z	145/80	R 13	75	Q	4	562	145	256	1714
	LM18 BZ	145/80	R 14	76	Q	4	588	145	268	1793
	LM18 BZ	155/80	R 13	79	Q	4 1/2	578	157	262	1763
	LM18 Z	165/80	R 14	85	Q	4 1/2	620	165	281	1891
	LM18 BZ	175/80	R 14	88	T	5	636	177	287	1940
70 Series	LM18	145/70	R 13	71	T	4 1/2	534	150	245	1629
	LM18 Z	195/70	R 14	95 RFD	T	6	630	201	285	1922
	LM18 Z	195/70	R 15	97 RFD	S	6	655	201	297	1998
65 Series	LM18 FZ	145/65	R 15	72	T	4 1/2	569	150	264	1735
	LM18	175/65	R 15	84	T	5	609	177	279	1857
	LM18 Z	195/65	R 14	89	T	6	610	201	277	1861
	LM18 DZ	235/65	R 17	108 XL	H	7	738	240	335	2251
60 Series	LM18	185/60	R 15	84	T	5 1/2	603	189	277	1839
	LM18	185/60	R 15	88 XL	T	5 1/2	603	189	277	1839
	LM18 Z	195/60	R 15	88	H	6	615	201	282	1876
	LM18 Z	225/60	R 17	99	H	6 1/2	702	228	321	2141
	LM18 Z	235/60	R 16	100	H	7	688	240	313	2098
55 Series	LM18 FZ	175/55	R 15	77	T	5 1/2	573	182	265	1748

XL = extra load  
RFD = Reinforced

Rolling Circumference ± 2%

# BLIZZAK LM-22



A high performance, studless winter tyre, the Blizzak LM-22 employs Bridgestone's latest technology to provide excellent grip and handling whether on snow, wet or dry surfaces – particularly well suited to Europe's changeable winter weather.



55 Series	LM22 Z	205/55	R 15	88	H	6 1/2	607	214	279	1851
	LM22 DZ*	205/55	R 16	91	H	6 1/2	632	214	291	1928
	LM22 Z	235/55	R 17	99	V	7 1/2	690	245	317	2105
50 Series	LM22 Z	255/55	R 18	109 XL	H	8	737	265	338	2248
	LM22 Z	205/50	R 17	93 RFD	H	6 1/2	638	214	296	1946
	LM22 Z	225/50	R 16	92	H	7	632	233	291	1928
	LM22 Z	225/50	R 17	94	V	7	658	233	304	2007
	LM22 BZ*	225/50	R 17	94	H	7	658	233	304	2007
45 Series	LM22 Z	235/50	R 17	96	V	7 1/2	668	245	308	2037
	LM22 Z	235/50	R 18	101 XL	V	7 1/2	693	245	321	2114
	LM22 Z	215/45	R 18	89	V	7	651	213	304	1986
	LM22 Z	215/45	R 18	93 XL	V	7	651	213	304	1986
	LM22 BZ*	225/45	R 17	91	H/V	7 1/2	634	225	295	1934
40 Series	LM22 Z	225/45	R 17	91	V	7 1/2	634	225	295	1934
	LM22 Z	245/45	R 18	96	V	8	677	243	314	2065
	LM22 Z	255/45	R 18	103 XL	V	8 1/2	687	255	318	2095
	LM22 Z	215/40	R 17	83	V	7 1/2	604	218	283	1842
	LM22 Z	245/40	R 17	91	H	8 1/2	628	248	292	1915
	LM22 Z	255/40	R 19	100 XL	V	9	687	260	321	2095

XL = extra load  
RFD = Reinforced  
\*RFT: Run Flat Tyre



Rolling Circumference ± 2%



# BLIZZAK NORDIC

Bridgestone's new Blizzak Nordic takes studless performance in extreme winter conditions to new levels.

- Excellent handling in a wide range of winter conditions, even at higher speeds
- Highly durable construction reduces road noise and enhances comfort
- Improved driving performance in both wet & dry conditions



70 Series	BNORDIC	175/70	R 13	82R	TL	5	576	177	261	1757	
	BNORDIC	185/70	R 14	88R	TL	5 1/2	616	189	279	1879	
65 Series	BNORDIC	175/65	R 14	82R	TL	5	584	177	267	1781	
	BNORDIC	185/65	R 14	86R	TL	5 1/2	596	189	272	1818	
	BNORDIC	185/65	R 15	88R	TL	5 1/2	621	189	284	1894	
	BNORDIC	195/65	R 15	91R	TL	6	635	201	290	1937	
	BNORDIC	205/65	R 15	94R	TL	6	647	209	294	1973	
60 Series	BNORDIC	185/60	R 14	82R	TL	5 1/2	578	189	265	1763	
	BNORDIC	185/60	R 15	84R	TL	5 1/2	603	189	277	1839	
	BNORDIC	195/60	R 15	88R	TL	6	615	201	282	1876	
	BNORDIC	205/60	R 16	96R XL	TL	6	652	209	299	1989	
	BNORDIC	215/60	R 16	95R	TL	6 1/2	664	221	304	2025	
55 Series	BNORDIC	185/55	R 15	82R	TL	6	585	194	270	1784	
	BNORDIC	195/55	R 15	89R XL	TL	6	595	201	274	1815	
	BNORDIC	195/55	R 16	87R	TL	6	620	201	287	1891	
	BNORDIC	205/55	R 16	94R XL	TL	6 1/2	632	214	291	1928	
	BNORDIC	215/55	R 16	97R XL	TL	7	642	226	295	1958	
	BNORDIC	225/55	R 16	99R XL	TL	7	654	233	300	1995	
	BNORDIC	225/55	R 17	101R XL	TL	7	680	233	313	2074	
50 Series	BNORDIC	225/50	R 17	98R XL	TL	7	658	233	304	2007	
45 Series	BNORDIC	225/45	R 17	94R XL	TL	7 1/2	634	225	295	1934	

XL = extra load

Rolling Circumference ± 2%

# BLIZZAK WS-50



The WS-50 extends performance on snow/slush surfaces and will meet exactly the changing weather conditions of winters in the Nordic countries.

The better wear life will increase the overall satisfaction of "WS-50" drivers.



80 Series	WS50 Z	155 / 80	R 13	79	Q	4 1/2	578	157	262	1763
70 Series	WS50 Z	185 / 70	R 13	86	Q	5 1/2	590	189	266	1800
	WS50 Z	195 / 70	R 14	91	Q	6	630	201	285	1922
	WS50 Z	205 / 70	R 14	95	Q	6	644	209	290	1964
	WS50 Z	205 / 70	R 15	96	Q	6	669	209	303	2040
65 Series	WS50 Z	195 / 65	R 14	89	Q	6	610	201	277	1861
	WS50 Z	215 / 65	R 15	96	Q	6 1/2	661	221	300	2016
60 Series	WS50 Z	205 / 60	R 15	91	Q	6	627	209	286	1912
	WS50 Z	225 / 60	R 16	98	Q	6 1/2	676	228	308	2062
	WS50 Z	235 / 60	R 16	100	Q	7	688	240	313	2098
55 Series	WS50 AZ	235 / 55	R 18	100	Q	7 1/2	715	245	329	2181
50 Series	WS50 AZ	205 / 50	R 16	87	Q	6 1/2	612	214	283	1867
45 Series	WS50 AZ	215 / 45	R 17	87	Q	7	626	213	292	1909
	WS50 AZ	235 / 45	R 17	94	Q	8	644	236	299	1964
	WS50 AZ	245 / 45	R 17	95	Q	8	652	243	302	1989

Rolling Circumference ± 2%

# BLIZZAK MZ-03



50 Series MZ03 AZ	165/50 R 15	73	Q	5	547	170	255	1668	
40 Series MZ03 CZ*	245/40 R 18	93	Q	8 1/2	653	248	305	1992	

\*RFT: Run Flat Tyre **RFT**

Rolling Circumference ± 2%

# BLIZZAK MZ-02



65 Series	MZ02 Z	155 / 65	R 13	73	Q	4 1/2	532	157	244	1623

Rolling Circumference ± 2%

# BLIZZAK MZ-01



65 Series	MZ01 Z	145/65 R 13	69	Q	4 1/2	518	150	238	1580

Rolling Circumference ± 2%

# NORANZA



Noranza provides exceptional ice grip, without sacrificing comfort, handling and quietness. The light weight aluminium studs with high retention and low noise are friendly to both driver and environment.



80 Series	NORANZA	155/80	R 13	79	Q	4 1/2	578	157	262	1763	
	NORANZA	165/80	R 13	83	Q	4 1/2	594	165	268	1812	
	NORANZA	175/80	R 14	88	Q	5	636	177	287	1940	
70 Series	NORANZA	155/70	R 13	75	T	4 1/2	548	157	250	1671	
	NORANZA	165/70	R 13	79	T	5	562	170	256	1714	
	NORANZA	165/70	R 14	81	T	5	588	170	268	1793	
	NORANZA	175/70	R 13	82	T	5	576	177	261	1757	
	NORANZA	175/70	R 14	84	T	5	602	177	274	1836	
	NORANZA	185/70	R 14	88	T	5 1/2	616	189	279	1879	
	65 Series	NORANZA	165/65	R 14	79	T	5	570	170	261	1739
NORANZA		175/65	R 14	82	T	5	584	177	267	1781	
NORANZA		185/65	R 14	86	T	5 1/2	596	189	272	1818	
NORANZA		185/65	R 15	88	T	5 1/2	621	189	284	1894	
NORANZA		195/65	R 15	91	T	6	635	201	290	1937	
NORANZA		205/65	R 15	94	T	6	647	209	294	1973	
60 Series	NORANZA	215/65	R 16	102 XL	T	6 1/2	686	221	312	2092	
	NORANZA	195/60	R 15	88	T	6	615	201	282	1876	
	NORANZA	205/60	R 16	92	T	6	652	209	299	1989	
	NORANZA	235/60	R 16	100	T	7	688	240	313	2098	
55 Series	NORANZA	195/55	R 15	85	T	6	595	201	274	1815	
	NORANZA	205/55	R 16	91	T	6 1/2	632	214	291	1928	
	NORANZA	215/55	R 16	97 XL	T	7	642	226	295	1958	
45 Series	NORANZA	225/45	R 17	91	T	7 1/2	634	225	295	1934	

XL = extra load

Rolling Circumference ± 2%










## 4x4 Specific Info

4X4 SPECIFIC INFO

# Bridgestone recommended profile



Season	Summer				Winter	
Use and terrain condition	100% road	80% road 20% off road (mild off-road use)	60% road 40% off road	20% road 80% off road (heavy duty off-road use)	Temperatures under 7 degrees, frequent rain, snow and occasional ice	Temperatures under 7 degrees, snow and frequent ice
Customer expectations						
<ul style="list-style-type: none"> <li>- Driving precision</li> <li>- High speed steering accuracy</li> <li>- Safety on wet roads</li> <li>- Comfort</li> <li>- Aggressive design</li> </ul>	 <p>Dueler H/P Sport Dueler H/P 680</p>					
<ul style="list-style-type: none"> <li>- Safety on wet roads</li> <li>- High speed steering accuracy</li> <li>- Silent, driving comfort</li> <li>- Mileage</li> </ul>	 <p>Dueler H/L 683</p>					
<ul style="list-style-type: none"> <li>- Smooth comfortable drive</li> <li>- Silent</li> <li>- Selected by many car manufacturers</li> </ul>		 <p>Dueler H/T 689</p>				
<ul style="list-style-type: none"> <li>- Modern 4x4 style</li> <li>- Mileage</li> <li>- All round performer</li> </ul>			 <p>Dueler A/T 694</p>			
<ul style="list-style-type: none"> <li>- Tough &amp; durable</li> <li>- Exceptional traction and flotation under extreme use</li> </ul>				 <p>Dueler M/T 673</p>		
<ul style="list-style-type: none"> <li>- Safety and control in winter conditions</li> <li>- Excellent road holding capabilities</li> </ul>					 <p>Blizzak LM25 4x4</p>	
<ul style="list-style-type: none"> <li>- Grip on ice, alternative solution to studded tyres</li> </ul>						 <p>Blizzak DMZ3</p>



# Size conversion chart

Original Size			Option Sizes →											
85/80 Series			75 Series			70 Series			65/60 Series			Other Sizes		
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
195/80 R15	694	94	P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98			
215/80 R15	723	101				235/70 R15	715	103	P275/60 R15	708	107			
225/80 R15	741	105				255/70 R15	741	112	P265/60 R17	752	108	30x950 R15	753	105
						245/70 R16	753	107						
175/80 R16	692	91	P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98			
205/80 R16	740	99	235/75 R15	735	104	255/70 R15	741	112	P265/60 R17	752	108	30x950 R15	753	105
			225/75 R16	748	103	245/70 R16	753	107						
215/80 R16	748	107				255/70 R15	741	112	P265/60 R17	752	108			
						265/70 R15	753	110						
235/80 R16	782	109	265/75 R15	780	112	P255/70 R16	767	109	P265/60 R18	777	109	31x1050 R15	780	109
												31x1150 R15	780	110
215/85 R16	780	110	265/75 R15	780	112	265/70 R16	777	112	P285/60 R18	801	114	31x1150 R15	780	110
235/85 R16	817	108	265/75 R16	808	112							750 R16	810	114

Original Size			Option Sizes →								
75 Series			70 Series			65/60 Series			Other Sizes		
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
P205/75 R15	692	97	225/70 R15	699	100	215/65 R16	691	98			
215/75 R15	710	100	225/70 R15	699	100	P275/60 R15	708	107			
			235/70 R15	715	103						
235/75 R15	735	104	255/70 R15	741	112						
225/75 R16	748	103	255/70 R15	741	112	P265/60 R17	752	108	30x950 R15	753	105
			245/70 R16	753	107						
245/75 R16	779	108	P255/70 R16	767	109	P265/60 R18	777	109	31x1050 R15	780	109
			265/70 R16	777	112				31x1150 R15	780	110
265/75 R15	780	112	265/70 R16	777	112						
265/75 R16	808	112									
285/75 R16	838	116				P285/60 R18	801	114			
									750 R16	810	114

Original Size			Option Sizes →					
70 Series			65/60 Series			Other Sizes		
Size	O.D.	L.I.	Size	O.D.	L.I.	Size	O.D.	L.I.
205/70 R15	668	95						
225/70 R15	699	100	235/60 R16	688	100			
			255/50 R17	690	100			
235/70 R15	715	103	P275/60 R15	708	107			
255/70 R15	741	112						
265/70 R16	753	110						
205/70 R16	700	97	215/65 R16	691	98			
			P275/60 R15	708	107			
215/70 R16	707	99	P275/60 R15	708	107			
245/70 R16	753	107	P265/60 R17	752	108			
			P265/60 R17	752	108			
P255/70 R16	767	109	P275/60 R17	764	110			
			P265/60 R18	777	109			
275/70 R16	793	114	P285/60 R18	801	114			
						750 R16	810	114

**NOTES :**

1. This chart does not imply complete interchangeability. Tyre interchangeability is not always possible due to differences in rim sizes, tyre dimensions, load ratings, wheel-well clearances, vehicle handling and manufacturer's recommendations.
2. Always check the vehicle manufacturer's recommendations for tyre size options before replacing tyres with different sizes and/or constructions.





**4x4 Summer  
OE/Replacement**


4X4 SUMMER

# DUELER SPORT



Driving precision tyre for sporty SUV's with class-leading wet performance and comfort. An aggressive design with asymmetric tread pattern on larger rim sizes.

**Positioning:**

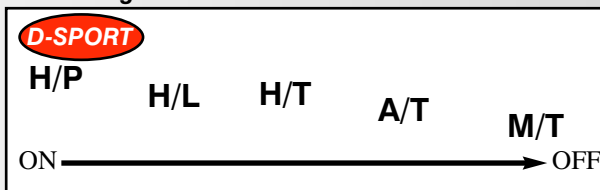

65 Series	D-SPORT	235/65	R 17	108 XL	V	7	738	240	335	2251	
	D-SPORT AZ	235/65	R 17	104	V	7	738	240	335	2251	
	D-SPORT AZ	235/65	R 17	108 XL	V	7	738	240	335	2251	
	D-SPORT AZ	255/65	R 16	109	H	7 1/2	738	260	333	2251	
60 Series	D-SPORT AZ	235/60	R 16	100	H	7	688	240	313	2098	
	D-SPORT	235/60	R 18	107 XL	W	7	739	240	339	2254	
	D-SPORT	255/60	R 17	106	H/V	7 1/2	738	260	335	2251	
	D-SPORT	255/60	R 18	112 XL	V	7 1/2	763	260	348	2327	
	D-SPORT BZ	285/60	R 18	116	V	8 1/2	799	292	362	2437	
55 Series	D-SPORT	225/55	R 17	97	W	7	680	233	313	2074	
	D-SPORT	235/55	R 17	99	H	7 1/2	690	245	317	2105	
	D-SPORT	255/55	R 18	109 XL	Y	8	737	265	338	2248	
	D-SPORT*	255/55	R 18	109 XL	H/V	8	737	265	338	2248	
	D-SPORT GZ	275/55	R 17	109	V	8 1/2	734	284	334	2239	
	D-SPORT	285/55	R 18	113	V	9	771	297	351	2352	
50 Series	D-SPORT	285/50	R 18	109	W	9	743	297	340	2266	
	D-SPORT*	255/50	R 19	107 XL	V/W	8	739	265	341	2254	
	D-SPORT	255/50	R 19	103	V	8	739	265	341	2254	
	D-SPORT	265/50	R 19	110 XL	Y	8 1/2	749	277	345	2284	
45 Series	D-SPORT	275/45	R 19	108 XL	Y	9	731	273	338	2230	
	D-SPORT*	285/45	R 19	111 XL	V/W	9 1/2	739	285	341	2254	
	D-SPORT	285/45	R 19	107	V	9 1/2	739	285	341	2254	
	D-SPORT	275/45	R 20	110 XL	Y	9	756	273	351	2306	
40 Series	D-SPORT*	275/40	R 20	106 XL	V/W	9 1/2	728	278	340	2220	
	D-SPORT	275/40	R 20	106 XL	Y	9 1/2	728	278	340	2220	
35 Series	D-SPORT*	315/35	R 20	110 XL	V/W	11	728	320	340	2220	

XL = extra load


\*RFT: Run Flat Tyre

Rolling Circumference ± 2%

# DUELER H/P680 (D680)

High performance 4x4 tyre for highway use.  
 Superb Wet and Dry capability.  
 Sports oriented handling.  
 Quiet and comfortable ride.

**Positioning:**

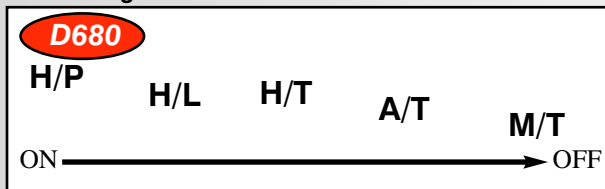

M+S

70 Series	D680 Z	245/70	R 16	107	H	7	750	248	337	2288
	D680 Z	265/70	R 15	110	H	8	753	272	336	2297
	D680 Z	265/70	R 16	112	H	8	778	272	348	2373
	D680 Z	275/70	R 16	114	H	8	792	279	354	2416
65 Series	D680	215/65	R 16	98	H	6 1/2	686	221	312	2092
60 Series	D680 Z	265/60	R 18	109	H	8	775	272	353	2364
	D680 Z	275/60	R 17	110	H	8	762	279	345	2324
55 Series	D680 Z	255/55	R 18	109 RFD	H	8	737	265	338	2248
50 Series	D680 Z	255/50	R 17	101	H	8	688	265	316	2098

RFD = Reinforced


Rolling Circumference ± 2%

# DUELER H/L683 (D683)



The Dueler H/L 683 is specially designed for highway use, pure comfort oriented drivers of luxury 4x4 vehicles. Its "state of the art" pattern and carcass provide excellent comfort and a quiet ride. Available with black or white outlined "aggressive" sidewall lettering.

**Positioning:**

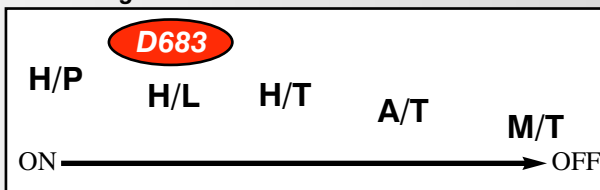


80 Series	D683 UZ	195 / 80	R 15	96	T	5 1/2	693	196	312	2114
	D683 UZ	205 / 80	R 16	104	T	5 1/2	734	203	331	2239
	D683	215 / 80	R 15	102	T	6	725	216	325	2211
75 Series	D683	225 / 75	R 16	103	T	6	744	223	335	2269
	D683 DZ	235 / 75	R 15	105	H/T	6 1/2	733	235	328	2236
70 Series	D683 UZ	215 / 70	R 16	100	T	6 1/2	708	221	321	2159
	D683 UZ	245 / 70	R 16	107	T	7	750	248	337	2288
	D683 CZ	255 / 70	R 16	109	H	7 1/2	764	260	343	2330
	D683	265 / 70	R 16	112	T	8	778	272	348	2373
65 Series	D683 CZ	255 / 65	R 16	109	H	7 1/2	738	260	333	2251
60 Series	D683 UZ	235 / 60	R 16	100	H	7	688	240	313	2098

Rolling Circumference ± 2%

# DUELER H/T689 (D689)

Bridgestone's most popular 4x4 tyre, the H/T689 also enjoys a wide range of Original Equipment approvals. The success of the H/T689 is due to its refined and well-balanced, highway oriented performance.

**Positioning:**

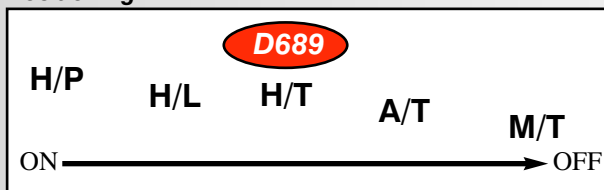

82 Series	D689 DZ	195	R 15	94	S	5 1/2	690	198	311	2105
	D689 FZ	195	R 15	106	Q	5 1/2	690	198	311	2105
	D689 Z	215	R 15	100	S	6	724	218	324	2208
	D689 EZ	205	R 16	110	Q	6	736	208	332	2245
80 Series	D689 Z	215/80	R 15	102	S	6	725	216	325	2211
	D689	205/80	R 16	104	T	5 1/2	734	203	331	2239
	D689 DZ	215/80	R 16	107 RFD	S	6	750	216	337	2288
	D689 BZ	235/80	R 16	109	S	6 1/2	782	235	350	2385
75 Series	D689 FZ	215/75	R 15	100	S	6	703	216	316	2144
	D689 AZ	235/75	R 15	105	T	6 1/2	733	235	328	2236
70 Series	D689 Z	255/70	R 15	108	S	7 1/2	739	260	330	2254
	D689 AZ	255/70	R 15	112	R	7 1/2	739	260	330	2254
	D689 AZ	265/70	R 15	110	H	8	753	272	336	2297
	D689 Z	265/70	R 15	110	S	8	753	272	336	2297
	D689 EZ	265/70	R 15	112	S	8	753	272	336	2297
	D689	235/70	R 16	105	H	7	736	240	332	2245
	D689 PZ	235/70	R 16	105	T	7	736	240	332	2245
	D689 CZ	245/70	R 16	107	S	7	750	248	337	2288
	D689 KZ	245/70	R 16	111 RFD	S	7	750	248	337	2288
	D689 CZ	255/70	R 16	111	T	7 1/2	764	260	343	2330
	D689 SZ	265/70	R 16	112	S	8	778	272	348	2373
	D689 AZ	265/70	R 16	112	H	8	778	272	348	2373
	65 Series	D689 QZ	265/70	R 16	112	S	8	778	272	348
D689 CZ		265/70	R 16	112	S	8	778	272	348	2373
D689 NZ		265/70	R 16	115	R	8	778	272	348	2373
D689 AZ		265/70	R 16	112	H	8	778	272	348	2373
D689 SZ		215/65	R 16	98	H/S	6 1/2	686	221	312	2092
D689 PZ		255/65	R 16	109	T	7 1/2	738	260	333	2251
D689 PZ		245/65	R 17	107	T	7	750	248	340	2288
Misc.		D689 EZ	10.50/	R15 LT	109	R	8 1/2	775	275	344


RFD = Reinforced

Rolling Circumference ± 2%

# DUELER H/T687



**Positioning:**

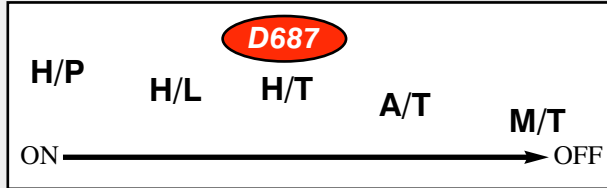

70 Series	D687 CZ	205/70	R 15	95	S	6	669	209	303	2040
	D687 JZ	215/70	R 16	99	H	6 1/2	708	221	321	2159
	D687	215/70	R 16	100	H	6 1/2	708	221	321	2159
	D687 KZ	215/70	R 16	99	H	6 1/2	708	221	321	2159
	D687 NZ	215/70	R 16	99	H	6 1/2	708	221	321	2159
	D687 DZ	225/70	R 15	100	S	6 1/2	697	228	314	2126
	D687 DZ	225/70	R 16	102	T	6 1/2	722	228	326	2202
	D687 NZ	225/70	R 16	102	S	6 1/2	722	228	326	2202
	D687 KZ	225/70	R 16	102	S	6 1/2	722	228	326	2202
65 Series	D687 DZ	235/70	R 16	105	T	7	736	240	332	2245
	D687 NZ	225/65	R 17	101	S	7 1/2	738	260	335	2251
	D687 KZ	225/65	R 17	101	S	7 1/2	738	260	335	2251
	D687 PZ	225/65	R 17	101	H	7 1/2	738	260	335	2251
60 Series	D687 RZ	225/65	R 17	101	H	7 1/2	738	260	335	2251
	D687 AZ	235/60	R 16	100	H	7	688	240	313	2098
	D687 GZ	235/60	R 16	100	H	7	688	240	313	2098
55 Series	D687 SZ	235/55	R 18	99	H	7 1/2	715	245	329	2181
	D687 TZ	235/55	R 18	99	H	7 1/2	715	245	329	2181


Rolling Circumference ± 2%



# DUELER H/T684 (D684)



**Positioning:**

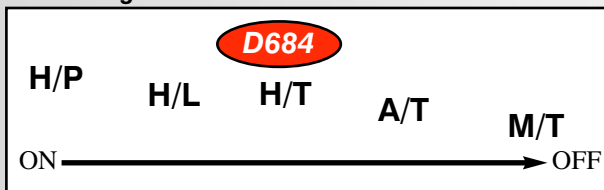

M+S

82 Series	D684 Z	195	R 15	94	R	5 1/2	690	198	311	2105
80 Series	D684 BZ	195 /80	R 15	96	S	5 1/2	693	196	312	2114
75 Series	D684 QZ	205 /75	R 15	97	S	5 1/2	689	203	311	2101
70 Series	D684 XZ	205 /70	R 15	95	S	6	669	209	303	2040
	D684 PZ	205 /70	R 15	96	T	6	669	209	303	2040
	D684 YZ	205 /70	R 15	95	H	6	669	209	303	2040
	D684 VZ	205 /70	R 15	96	H	6	669	209	303	2040
	D684 KZ	205 /70	R 15	96	T	6	669	209	303	2040
	D684 PZ	205 /70	R 15	95	S	6	669	209	303	2040
	D684 XZ	205 /70	R 15	95	S	6	669	209	303	2040
	D684 GZ	205 /70	R 15	95	Q	6	669	209	303	2040
65 Series	D684	185 /65	R 14	86	T	5 1/2	596	189	272	1818
	D684 PZ	205 /65	R 16	95	T	6	672	209	307	2050
	D684 VZ	215 /65	R 16	98	T	6 1/2	686	221	312	2092
	D684	215 /65	R 16	98	T	6 1/2	686	221	312	2092
	D684 MZ	235 /65	R 17	104	H	7	738	240	335	2251
60 Series	D684 PZ	275 /60	R 18	113	H	8	787	279	357	2400


Rolling Circumference ± 2%

# DUELER A/T693



A/T 693 offers true all-terrain versatility. UNI-T technology brings improved wet and dry handling, wear resistance. Advanced tread pattern design for optimum traction in off-road conditions.

**Positioning:**

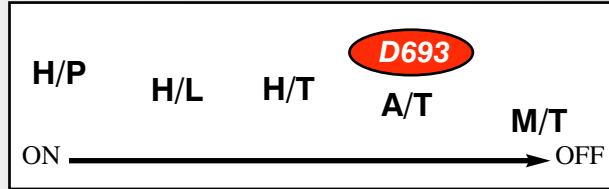

M+S

80 Series D693 UZ	235/80 R 16	109	S	6 1/2	782	235	350	2385		
75 Series D693 KZ	225/75 R 15	110	S	6	703	216	316	2144		
70 Series D693 II	165/70 R 14	81	T	5	588	170	268	1793		
D693 MZ	245/70 R 16	111 RFD	S	7	750	248	337	2288		
65 Series D693 UZ	255/65 R 16	109	S	7 1/2	738	260	333	2251		
D693	235/65 R 17	104	H	7	738	240	335	2251		
60 Series D693	235/60 R 18	103	H	7	739	240	339	2254		

RFD = Reinforced

Rolling Circumference ± 2%



## 4x4 Summer Replacement


4X4 SUMMER

# DUELER HTS686 (D686)



Uni-directional highway 4x4 tyre.  
 Excellent handling response and driving stability on both dry and wet roads at high speeds.  
 Combination of super slant grooves ensures reduced noise.

**Positioning:**

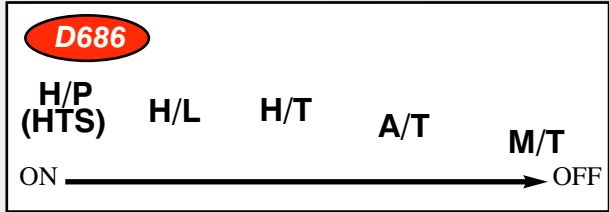


60 Series	D686	UZ	255/60	R 15	102	H	7 1/2	687	260	310	2095
	D686	UZ	275/60	R 15	107	H	8	711	279	319	2169

Rolling Circumference ± 2%

# DUELER A/T694

The rugged and stylish all terrain tyre with outstanding on-road performance.

**Positioning:**

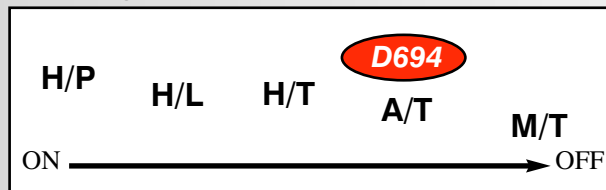

82 Series	D694	UZ	205	R16 C	110	S	6	736	208	332	2245	
80 Series	D694	UZ	195/80	R 15	96	T	5 1/2	693	196	312	2114	
	D694	QZ	215/80	R 15	102	S	6	725	216	325	2211	
	D694	UZ	215/80	R 16	103	S	6	750	216	337	2288	
	D694	QZ	215/75	R 15	100	T	6	703	216	316	2144	
	D694	QZ	225/75	R 15	102	T	6	703	216	316	2144	
	D694	QZ	225/75	R 16	103	S	6	744	223	335	2269	
	D694	QZ	235/75	R 15	104	S	6 1/2	733	235	328	2236	
	D694		235/75	R 15	109 XL	T	6 1/2	733	235	328	2236	
	D694	QZ	245/75	R 16	108	S	7	774	248	347	2361	
	D694	QZ	265/75	R 16	112	S	7 1/2	804	267	358	2452	
	D694	QZ	285/75	R 16	116	R	8	833	289	370	2541	
70 Series	D694	UZ	205/70	R 15	96	T	6	669	209	303	2040	
	D694	UZ	215/70	R 16	100	S	6 1/2	708	221	321	2159	
	D694	UZ	225/70	R 15	100	T	6 1/2	697	228	314	2126	
	D694	QZ	225/70	R 16	102	S	6 1/2	722	228	326	2202	
	D694	UZ	235/70	R 15	103	S	7	711	240	319	2169	
	D694	UZ	235/70	R 16	105	T	7	736	240	332	2245	
	D694	UZ	245/70	R 16	107	T	7	750	248	337	2288	
	D694	QZ	255/70	R 16	111	S	7 1/2	764	260	343	2330	
	D694	UZ	265/70	R 15	112	S	8	753	272	336	2297	
	D694	UZ	265/70	R 16	112	T	8	778	272	348	2373	
	D694	UZ	275/70	R 16	114	S	8	792	279	354	2416	
65 Series	D694	UZ	215/65	R 16	98	T	6 1/2	686	221	312	2092	
	D694	UZ	265/65	R 17	112	T	8	776	272	350	2367	
Misc.	D694 QZ		9.50/	R 15	104	S	7 1/2	751	244	335	2291	
	D694 QZ		10.50/	R 15	109	S	8 1/2	775	275	344	2364	
	D694 Z		7.50/	R 16	112	N	6	802	210	357	2446	

XL = extra load

Rolling Circumference ± 2%

# DUELER M/T673



The M/T 673's main strength is exceptional traction and flotation in all off-road conditions - mud, dirt, etc...  
 At the same time, M/T673 brings improvements in on-road performance such as wet grip, dry handling and ride comfort.

**Positioning:**



M+S

85 Series	D673 UZ	235 / 85	R 16	120	Q	6 1/2	806	235	359	2458
75 Series	D673 QZ	215 / 75	R 15	100	S	6	703	216	316	2144
	D673 QZ	225 / 75	R 16	103	S	6	744	223	335	2269
	D673 QZ	235 / 75	R 15	104	S	6 1/2	733	235	328	2236
	D673 UZ	245 / 75	R 16	120	Q	7	774	248	347	2361
	D673 QZ	265 / 75	R 16	112	S	7 1/2	804	267	358	2452
Misc.	D673 QZ	10.50 /	R 15	109	S	8 1/2	775	275	344	2364
	D673 QZ	11.50 /	R 15	113	Q/S	9	807	302	357	2461
	D673 QZ	12.50 /	R 15	108	Q	10	832	329	366	2538

Rolling Circumference ± 2%

# DUELER M/T671 (D671)

Designed for the real off-roader seeking outstanding traction on mud and superb durability.  
Good wear performance and irregular wear resistance.



**Positioning:**



M+S

Misc.	D671 Z	7.50/	R 16	114	M	6	802	210	357	2446
	D671 AZ	37X12.50/	R17.5	125	L	10	930	304	412	2837

Rolling Circumference ± 2%








**4x4 Summer  
OE**

4X4 SUMMER

# DUELER H/T688 (D688)



**Positioning:**

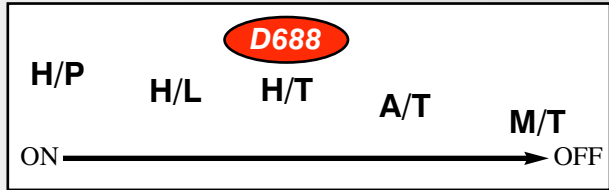


M+S

65 Series	D688	215 / 65 R 16	98	S	6 1/2	686	221	312	2092
	D688 EZ	215 / 65 R 16	102	T	6 1/2	686	221	312	2092

Rolling Circumference ± 2%

# DUELER H/T840 (D840)

**Positioning:**

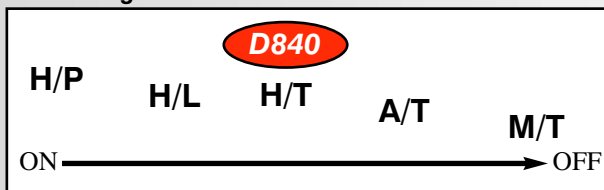

82 Series	D840 Z	205	R 16	110/108	R	6	736	208	332	2245
	D840 BZ	205	R16C	110	S	6	736	208	332	2245
70 Series	D840 JZ	225/70	R 17	108 RFD	S	6 1/2	748	228	339	2281
	D840 KZ	225/70	R 17	108 RFD	S	6 1/2	748	228	339	2281
	D840 KZ	235/70	R 16	105	T	7	736	240	332	2245
	D840 UZ	235/70	R 16	106	T	7	736	240	332	2245
	D840 KZ	235/70	R 16	106	H	7	736	240	332	2245
	D840 BZ	255/70	R15C	112/110	S	7 1/2	739	260	330	2254
65 Series	D840 Z	255/70	R 16	111	S	7 1/2	764	260	343	2330
	D840 Z	P265/65	R 17	110	S	8	776	272	350	2367
	D840 BZ	265/65	R 17	112	S	8	776	272	350	2367
	D840 CZ	265/65	R 17	112	S	8	776	272	350	2367
	D840 LZ	265/65	R 17	112	H	8	776	272	350	2367
	D840 LZ	275/65	R 17	114	H	8	790	279	356	2410
	D840 AZ	275/65	R 17	114	H	8	790	279	356	2410
60 Series	D840 QZ	275/65	R 17	115	T	8	790	279	356	2410
	D840 Z	255/60	R 17	106	T	7 1/2	738	260	335	2251

RFD = Reinforced

Rolling Circumference ± 2%

# TURANZA EL42



**BMW X3.**

65 Series	EL42 KZ	215/60	R 17	96	H	6 1/2	690	221	317	2105
55 Series	EL42 KZ	235/55	R 17	99	H	7 1/2	690	245	317	2105
	EL42 KZ	255/55	R 18	105	V	8	737	265	338	2248
50 Series	EL42 FZ	235/50	R 18	97	H	7 1/2	693	245	321	2114

Rolling Circumference ± 2%

# TURANZA ER30

BMW X5, Porsche Cayenne.



65 Series	ER30YZ	235/65	R 17	108 XL	V	7	738	240	335	2251
	ER30	235/65	R 17	104	V	7	738	240	335	2251
55 Series	ER30YZ	255/55	R 18	109 XL	Y	8	737	265	338	2248
	ER30	255/55	R 18	105	W	8	737	265	338	2248
50 Series	ER30TZ	255/50	R 19	103	V	8	739	265	341	2254
	ER30	255/50	R 19	103	W	8	739	265	341	2254
45 Series	ER30TZ	285/45	R 19	107	V	9 1/2	739	285	341	2254
	ER30	285/45	R 19	107	W	9 1/2	739	285	341	2254


XL = extra load

Rolling Circumference ± 2%

# RD-604 STEEL DESERT DUELER



Positioning:

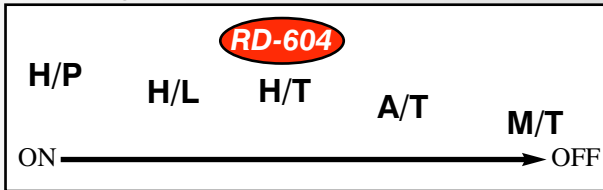

M+S



82 Series	604V AZ	205	R16C	110	R	6	736	208	332	2245
	604V WZ	10	R 15	109	N	8 1/2	775	278	344	2364

Rolling Circumference ± 2%

# RD-610 STEEL DESERT DUELER



Positioning:



75 Series	610V UZ	265/75	R 15	112	S	7 1/2	804	267	355	2452
-----------	---------	--------	------	-----	---	-------	-----	-----	-----	------

Rolling Circumference ± 2%



**4x4 Winter**

4X4 WINTER

# BLIZZAK LM25 4X4



Specially designed for high-powered 4X4 sports utility vehicles, this new Bridgestone tyre gives you top-class handling at higher speeds on wet and dry surfaces, plus excellent grip on snow and ice.

80 Series	LM25-4 MZ	205/80	R 16	104 XL	T	5 1/2	734	203	331	2239
75 Series	LM25-4 MZ	225/75	R 16	104	T	6	744	223	335	2269
	LM25-4 MZ	235/75	R 15	105	T	6 1/2	733	235	328	2236
	LM25-4 MZ	235/75	R 15	109 XL	T	6 1/2	733	235	328	2236
70 Series	LM25-4 MZ	205/70	R 15	96	T	6	669	209	303	2040
	LM25-4 MZ	215/70	R 16	100	T	6 1/2	708	221	321	2159
	LM25-4 MZ	225/70	R 16	107 XL	H/T	6 1/2	722	228	326	2202
	LM25-4 MZ	235/70	R 16	106	T	7	736	240	332	2245
	LM25-4 MZ	245/70	R 16	107	T	7	750	248	337	2288
	LM25-4 MZ	265/70	R 15	112	T	8	753	272	336	2297
	LM25-4 MZ	265/70	R 16	112	T	8	778	272	348	2373
65 Series	LM25-4 MZ	215/65	R 16	98	H	6 1/2	686	221	312	2092
	LM25-4 MZ	215/65	R 16	98	T	6 1/2	686	221	312	2092
	LM25-4 MZ	235/65	R 17	104	H	7	738	240	335	2251
	LM25-4 MZ	235/65	R 17	108 XL	H	7	738	240	335	2251
	LM25-4 MZ	255/65	R 16	109	H/T	7 1/2	738	260	333	2251
	LM25-4 MZ	265/65	R 17	112	H	8	776	272	350	2367
60 Series	LM25-4 MZ	255/60	R 17	106	H	7 1/2	738	260	335	2251
	LM25-4 MZ	275/60	R 18	113	H	8	787	279	357	2400
55 Series	LM25-4 NZ	225/55	R 17	97	H	7	680	233	313	2074
	LM25-4 NZ	235/55	R 17	99	H	7 1/2	690	245	317	2105
	LM25-4 SZ	235/55	R 18	100	H	7 1/2	715	245	329	2181
	LM25-4 NZ	235/55	R 18	100	H	7 1/2	715	245	329	2181
	LM25-4 NZ	255/55	R 18	109 XL	H	8	737	265	338	2248
	LM25-4 NZ	255/55	R 18	109	V	8	737	265	338	2248
	LM25-4 NZ	275/55	R 17	109	H	8 1/2	734	284	334	2239
50 Series	LM25-4 NZ	235/50	R 18	97	H	7 1/2	693	245	321	2114

XL = extra load

Rolling Circumference ± 2%



# BLIZZAK DMZ3

Thanks to the new generation multicell technology, the DM-Z3 gives you top 4x4 performance whatever the weather throws at you. Hard wearing on the road and hard working off it, the DM-Z3 lets you go where your imagination takes you.

- Snow simulation technology.
- The block edge platform design gives an increased takeoff power on snow.
- The combination of riblet microgrooves and Multicell compound assumes consistent grip on ice, from the first day of usage.
- Increased braking and acceleration performance on ice.



80 Series	DMZ3 UZ	175/80	R 16	91	Q	5	686	177	312	2092	
	DMZ3 UZ	195/80	R 15	96	Q	5 1/2	693	196	312	2114	
	DMZ3 UZ	205/80	R 16	104 RFD	Q	5 1/2	734	203	331	2239	
	DMZ3 UZ	215/80	R 15	101	Q	6	725	216	325	2211	
	DMZ3 UZ	215/80	R 16	103	Q	6	750	216	337	2288	
	DMZ3 UZ	225/80	R 15	105	Q	6	741	223	331	2260	
70 Series	DMZ3 UZ	205/70	R 15	96	Q	6	669	209	303	2040	
	DMZ3 UZ	215/70	R 16	99	Q	6 1/2	708	221	321	2159	
	DMZ3 UZ	225/70	R 15	100	Q	6 1/2	697	228	314	2126	
	DMZ3 UZ	225/70	R 17	108 RFD	Q	6 1/2	748	228	339	2281	
	DMZ3 UZ	235/70	R 15	103	Q	7	711	240	319	2169	
	DMZ3 UZ	235/70	R 16	105	Q	7	736	240	332	2245	
	DMZ3 UZ	245/70	R 16	107	Q	7	750	248	337	2288	
	DMZ3 UZ	255/70	R 16	109	Q	7 1/2	764	260	343	2330	
	DMZ3 UZ	265/70	R 15	110	Q	8	753	272	336	2297	
	DMZ3 UZ	265/70	R 16	112	Q	8	778	272	348	2373	
	DMZ3 UZ	275/70	R 16	114	Q	8	792	279	354	2416	
	65 Series	DMZ3 UZ	215/65	R 16	98	Q	6 1/2	686	221	312	2092
DMZ3 UZ		225/65	R 17	101	Q	7 1/2	738	260	335	2251	
DMZ3 UZ		235/65	R 17	108 RFD	Q	7	738	240	335	2251	
DMZ3 UZ		255/65	R 16	109	Q	7 1/2	738	260	333	2251	
60 Series	DMZ3 UZ	265/65	R 17	112	Q	8	776	272	350	2367	
	DMZ3 UZ	225/60	R 17	99	Q	6 1/2	702	228	321	2141	
	DMZ3 UZ	235/60	R 16	100	Q	7	688	240	313	2098	
Misc.	DMZ3 UZ	275/60	R 18	113	Q	8	787	279	357	2400	
	DMZ3 UZ	9.50/	R 15	104	Q	7 1/2	750	247	334	2288	
	DMZ3 UZ	10.50/	R 15	109	Q	8 1/2	775	275	344	2364	

RFD = Reinforced

Rolling Circumference ± 2%





# Van Summer

□ VAN SUMMER

# DURAVIS R630



The Duravis R630 brings improved economy, safety and durability to commercial vans and light trucks. The Super LL Carbon compound helps extend tyre life up to 30% longer than conventional tyres and the advanced tread design provides outstanding wet handling. Additional technologies give the tyre rugged, durable performance for intensive commercial use.

82 Series	R630	175	R 14 C	99/98	R	5	634	178	286	1934	
	R630 FZ	185	R 14 C	102/100	R	5 1/2	650	188	293	1983	
	R630	185	R 15 C	103	R	5 1/2	674	188	305	2056	
	R630	195	R 14 C	106/104	R	5 1/2	666	198	299	2031	
75 Series	R630	175 / 75 R	14 C	99/98	R	5	618	177	280	1885	
	R630 FZ	175 / 75 R	16 C	101/99	R	5	668	177	305	2037	
	R630	185 / 75 R	14 C	102/100	R	5	634	184	286	1934	
	R630 FZ	185 / 75 R	16 C	104/102	R	5	684	184	311	2086	
	R630 FZ	195 / 75 R	16 C	107/105	R	5 1/2	698	196	317	2129	
	R630	195 / 75 R	16 C	107/105	R	5 1/2	698	196	317	2129	
	R630 FZ	205 / 75 R	16 C	110/108	R	5 1/2	714	203	323	2178	
	R630	205 / 75 R	16 C	110/108	R	5 1/2	714	203	323	2178	
	R630 FZ	215 / 75 R	16 C	113/111	R	6	728	216	329	2220	
	R630 FZ	215 / 75 R	16 C	116/114	Q	6	728	216	329	2220	
	R630	215 / 75 R	16 C	116/114	Q	6	728	216	329	2220	
70 Series	R630 FZ	195 / 70 R	15 C	104/102	R	6	655	201	297	1998	
	R630 FZ	205 / 70 R	15 C	106/104	R	6	669	209	303	2040	
	R630	205 / 70 R	15 C	106/104	R	6	669	209	303	2040	
	R630 FZ	215 / 70 R	15 C	109/107	R	6 1/2	683	221	308	2083	
	R630	215 / 70 R	15 CP	109/107	Q	6 1/2	683	221	308	2083	
	R630	215 / 70 R	15 C	109/107	S	6 1/2	683	221	308	2083	
	R630 FZ	225 / 70 R	15 C	112/110	R	6 1/2	697	228	314	2126	
	R630	225 / 70 R	15 C	112/110	S	6 1/2	697	228	314	2126	

Rolling Circumference ± 2%

# DURAVIS R630



65 Series	R630 FZ	195 / 65 R 16 C	104/102	R	6	660	201	302	2013	
	R630	195 / 65 R 16 C	104/102	R	6	660	201	302	2013	
	R630	205 / 65 R 16 C	107/105	R	6	672	209	307	2050	
	R630	205 / 65 R 16 C	107	T	6	672	209	307	2050	
	R630 FZ	215 / 65 R 16 C	109/107	R	6 1/2	686	221	312	2092	
	R630	215 / 65 R 16 C	109/107	R	6 1/2	686	221	312	2092	
	R630 FZ	225 / 65 R 16 C	112/110	R	6 1/2	698	228	317	2129	
	R630	225 / 65 R 16 C	112/110	R	6 1/2	698	228	317	2129	
	R630	235 / 65 R 16 C	115/113	R	7	712	240	322	2172	

Rolling Circumference ± 2%

# DURAVIS R410

Sections 145 & 165

Sections 175 & 195



The Duravis R410, is specially designed for car derived vans.

Application of latest technologies ensure a high durability, high mileage and safety in the wet.

The reinforced sidewall promotes the prevention of early tyre loss due to damage from curbing etc.

80 Series	R410 Z	165/80	R 13	87 RFD	R	4 1/2	594	165	268	1812	
70 Series	R410 Z	165/70	R 13	83 RFD	R	5	562	170	256	1714	
	R410 Z	165/70	R 14	85 RFD	R	5	588	170	268	1793	
	R410 Z	165/70	R 14 C	89/87	R	5	588	170	268	1793	
	R410 Z	195/70	R 15	97 RFD	T	6	655	201	297	1998	
65 Series	R410 Z	175/65	R 14 C	90/88	T	5	584	177	267	1781	
	R410 Z	175/65	R 14	86 RFD	T	5	584	177	267	1781	
	R410	195/65	R 16 C	100/98	T	6	660	201	302	2013	
	R410	205/65	R 16 C	103/101	T	6	672	209	307	2050	
	R410 Z	205/65	R 15 C	102/100	T	6	647	209	294	1973	
	R410 AZ	215/65	R 16 C	106/104	T	6 1/2	686	221	312	2092	
	R410 Z	215/65	R 15 C	100 RFD	T	6 1/2	661	221	300	2016	
	R410 Z	215/65	R 15 C	104/102	T	6 1/2	661	221	300	2016	
60 Series	R410 AZ	215/65	R 16 C	102/100	H	6 1/2	686	221	312	2092	
	R410	215/60	R 16 C	103/101	T	6 1/2	664	221	304	2025	
	R410 AZ	225/60	R 16	102 XL	H	6 1/2	676	228	308	2062	

XL = extra load  
RFD = Reinforced

Rolling Circumference ± 2%

# TURANZA ER30C



60 Series	ER30C	195 / 60	R16 C	99/97	H	6	640	201	294	1952
55 Series	ER30C	205 / 55	R16 C	98/96	H	6 1/2	632	214	291	1928

Rolling Circumference ± 2%

# RD613 STEEL



Designed for transporters for day-to-day deliveries around town.

The rib type tread pattern provides improved resistance to irregular wear and increased tread life.

Also increased durability.

82 Series	RD613 N	145	R 13 C	88	N	4	562	145	256	1714
	RD613 N	155	R 13 C	85	N	4 1/2	578	157	262	1763
	RD613	195	R 14 C	106	Q	5 1/2	666	198	299	2031
	RD613 NZ	195	R 15 C	106	R	5 1/2	690	198	311	2105
75 Series	RD613 GZ	205/75	R 14 C	109	Q	5 1/2	664	203	298	2025
70 Series	RD613 NZ	195/70	R 15 C	104/102	S	6	655	201	297	1998

Rolling Circumference ± 2%



# RD623

Designed for transporters for day-to-day deliveries around town.

R623 gives improved overall performance, especially in wet, dry, comfort and noise.

The aggressive, three wide zigzag groove tyre also features an increased tyre life because of optimised tread design as well as superior bead durability.



75 Series	R623	185/75	R 16 C	104/102	R	5	684	184	311	2086
	R623	215/75	R 16 C	113/111	R	6	728	216	329	2220
70 Series	R623 Z	195/70	R 15 C	100/98	R	6	655	201	297	1998
	R623 Z	195/70	R 15 C	104/102	R	6	655	201	297	1998
	R623 Z	205/70	R 15 C	106/104	Q	6	669	209	303	2040
	R623 GZ	205/70	R 15 C	106	S	6	669	209	303	2040
	R623 CZ	215/70	R 15 C	106	S	6 1/2	683	221	308	2083
	R623 Z	225/70	R 15 C	112/110	R	6 1/2	697	228	314	2126

Rolling Circumference ± 2%



## V-STEEL RIB 230 (R230)

An all position highway tyre offers high resistance to irregular wear.  
Also features excellent manoeuvring and cornering.

Inch sizes	R230	6.00/ R15 C	100	L	4 1/2	703	166	316	2144	
	R230	6.50/ R16 C	109	M	4 1/2	742	176	334	2263	

Rolling Circumference ± 2%



## V-STEEL RIB 294 (R294)

Steer axle designed tyre for highway use.  
Excellent wet and dry manoeuvrability and a long tread life.  
Can be used also as all-position tyre.

75 Series	R294 BZ	215/75 R 16 C	116	N	6	728	216	329	2220	
	R294 Z	225/75 R 16 C	121	N	6	744	223	335	2269	
	R294 Z	225/75 R 16 C	121/120	N	6	744	223	335	2269	

Rolling Circumference ± 2%



## Van Winter

□ VAN WINTER



# BLIZZAK LM18C

The LM-18C offers van drivers all the braking, balance and build quality of its sister car model. And thanks to its toughened construction, it'll do it for longer than ever. So as long as you have to deliver, so will the LM-18C. All the benefits of its sister car tyre, plus improved wear resistance and wear uniformity, excellent braking on ice and wet surfaces.

70 Series	LM18C Z	165/70	R 14 C	89/87	R	5	588	170	268	1793
65 Series	LM18C Z	175/65	R 14 C	90/88	T	5	584	177	267	1781
	LM18C Z	205/65	R 15 C	102/100	T	6	647	209	294	1973
	LM18C Z	215/65	R 16 C	106/104	T	6 1/2	686	221	312	2092
	LM18C Z	215/65	R 16 C	102/100	T	6 1/2	686	221	312	2092
60 Series	LM18C Z	195/60	R 16 C	99/97	T	6	640	201	294	1952
	LM18C Z	205/60	R 16 C	100/98	T	6	652	209	299	1989

Rolling Circumference ± 2%



# BLIZZAK LM22C

The LM22C offers MPV drivers the same lamellen construction, grip and response as the LM22 plus improved low temperature handling, less compromise on stability and comfort and better performances on both wet and dry surfaces.



55 Series	LM22C	205/55	R16 C	98/96	T	6 1/2	632	214	291	1928

Rolling Circumference ± 2%

# BLIZZAK W800

Ideal for changeable wintery conditions, this all position tyre has outstanding traction in snow, mud and wet. It provides smooth and responsive handling, a quiet and comfortable ride, and long-lasting durability.



82 Series	W800 Z	185	R 14 C	102/100	Q	5 1/2	650	188	293	1983
	W800 Z	195	R 14 C	106/104	Q	5 1/2	666	198	299	2031
75 Series	W800 Z	195 /75	R 16 C	107/105	R	5 1/2	698	196	317	2129
	W800 Z	205 /75	R 16 C	110/108	R	5 1/2	714	203	323	2178
	W800	205 /75	R 16 C	110/108	R	5 1/2	714	203	323	2178
	W800 Z	215 /75	R 16 C	113/111	R	6	728	216	329	2220
70 Series	W800 Z	195 /70	R 15 C	104/102	R	6	655	201	297	1998
	W800 Z	215 /70	R 15 C	109/107	R	6 1/2	683	221	308	2083
	W800 Z	225 /70	R 15 C	112/110	R	6 1/2	697	228	314	2126
65 Series	W800 Z	195 /65	R 16 C	104/102	R	6	660	201	302	2013
	W800 Z	205 /65	R 16 C	107/105	R	6	672	209	307	2050
	W800 Z	215 /65	R 16 C	109/107	R	6 1/2	686	221	312	2092
	W800 Z	225 /65	R 16 C	112/110	R	6 1/2	698	228	317	2129
	W800	235 /65	R 16 C	115/113	R	7	712	240	322	2172

Rolling Circumference ± 2%



# BLIZZAK W965 MULTICELL

Bridgestone's latest innovation of Multicell compound, the "Tube Multicell Compound" provides for the Blizzak W965 extended performance on ice & snow surfaces and will meet exactly the changing weather conditions of winters in the Nordic countries. Advanced tread-pattern technology maintains high-level wet and dry performance, as well as increased wear life in all conditions.



82 Series	W965 CZ	185/82	R 14 C	102/100	N	5 1/2	650	188	293	1983
	W965 CZ	195/82	R 14 C	106/104	N	5 1/2	666	198	299	2031
75 Series	W965 AZ	195/75	R 16 C	107/105	N	5 1/2	698	196	317	2129
	W965 AZ	205/75	R 16 C	113/111	N	5 1/2	714	203	323	2178
70 Series	W965 AZ	195/70	R 15 C	104/102	N	6	655	201	297	1998
	W965 AZ	225/70	R 15 C	112/110	N	6 1/2	697	228	314	2126

Rolling Circumference ± 2%



# RD-713 WINTER (RD-713)

A winter van radial tyre which provides excellent traction on snow and ice due to the aggressive tread pattern and special tread compound. More suited to nordic markets

M+S



82 Series	RD713W	155	R12 C	88	N	4 1/2	550	157	248	1678
	RD713W	145	R13 C	88	N	4	562	145	256	1714
	RD713W A	185	R14 C	102	N	5 1/2	650	188	293	1983
	RD713W	195	R14 C	106	N	5 1/2	666	198	299	2031
	RD713W Z	195	R15 C	106	N	5 1/2	690	198	311	2105
	RD713W	205	R16 C	106	N	6	736	208	332	2245
70 Series	RD713W Z	195 /70	R15 C	104	N	6	655	201	297	1998

Rolling Circumference ± 2%

# V-STEEL MIX M723

All season tyre for commercial vans and light trucks. The unique zigzag and lamellen siped pattern provides superior snow and wet performance and quiet operation. Its robust belt and bead construction ensure improved durability. M723 also offers superb serviceability.



82 Series	M723 AZ	145	R13 C	88/86	N	4	562	145	256	1714
	M723 AZ	165	R14 C	97/95	N	4 1/2	622	167	282	1897
	M723 AZ	205	R14 C	109/107	N	6	686	208	307	2092
	M723 AZ	215	R14 C	112/110	Q	6	700	218	312	2135
75 Series	M723 AZ	185/75	R16 C	104/102	P	5	684	184	311	2086
	M723 AZ	225/75	R16 C	121/120	N	6	744	223	335	2269
70 Series	M723 AZ	195/70	R15 C	104/102	R	6	655	201	297	1998
	M723 AZ	225/70	R15 RC	112/110	R	6 1/2	697	228	314	2126
	M723 AZ	225/70	R15 C	112/110	R	6 1/2	697	228	314	2126

Rolling Circumference ± 2%

# BRIDGESTONE INDEX

<b>PASSENGER SUMMER OE/REPLACEMENT:</b>	POTENZA RE050A	28
	TURANZA ER300	34
	TURANZA ER30 B250	36 38
<b>PASSENGER SUMMER REPLACEMENT:</b>	POTENZA S03PP	40
	POTENZA RE720	41
	B330EVO	42
	B330	42
<b>PASSENGER SUMMER OE:</b>	POTENZA RE050	44
	POTENZA RE040	46
	POTENZA RE030	48
	POTENZA RE031	48
	POTENZA RE010	49
	POTENZA RE71	49
	POTENZA RE88	50
	POTENZA RE070	50
	POTENZA RE080	51
	POTENZA S02A	51
	POTENZA S02 PP	52
	POTENZA S02	53
	POTENZA RE011	54
	EXPEDIA S01	55
	TURANZA ER31	56
	TURANZA ER33	56
	TURANZA ER42	57
	TURANZA EL42	57
	REGNO GR01	58
	REGNO GR03	58
	B340	59
	B360	59
	B371	60
	B381	60
	B390	61
	B391	62
	SF 226	63
	SF 237	63
	SF 321	64
	SF 322	64
	SF 381	65
<b>PASSENGER WINTER:</b>	BLIZZAK LM20	68
	BLIZZAK LM25	69
	BLIZZAK LM18	71
	BLIZZAK LM-22	72
	BLIZZAK NORDIC	73
	BLIZZAK WS-50	74
	BLIZZAK MZ-03	75
	BLIZZAK MZ-02	76
	BLIZZAK MZ-01	77
	NORANZA	78



# BRIDGESTONE INDEX

<b>4X4 SUMMER OE/REPLACEMENT:</b>	DUELER SPORT	84
	DUELER H/P 680	85
	DUELER H/L 683	86
	DUELER H/T 689	87
	DUELER H/T 687	88
	DUELER H/T 684	89
	DUELER A/T 693	90
<b>4X4 SUMMER REPLACEMENT:</b>	DUELER HTS 686	92
	DUELER A/T 694	93
	DUELER M/T 673	94
	DUELER M/T 671	95
<b>4X4 OE:</b>	DUELER H/T 688	98
	DUELER H/T 840	99
	TURANZA EL42	100
	TURANZA ER30	101
	RD604 STEEL DESERT DUELER	102
	RD610 STEEL DESERT DUELER	102
<b>4X4 WINTER:</b>	BLIZZAK LM25 4x4	104
	BLIZZAK DM Z3	105
<b>VAN SUMMER:</b>	DURAVIS R630	108
	DURAVIS R410	110
	TURANZA ER30C	111
	RD613 STEEL	112
	RD623	113
	V-STEEL RIB 230	114
	V-STEEL RIB 294	114
<b>VAN WINTER:</b>	BLIZZAK LM18C	116
	BLIZZAK LM22C	116
	BLIZZAK W800	117
	BLIZZAK W965 MULTICELL	118
	RD713W	118
	V-STEEL MIX M723	119

# BRIDGESTONE ADDRESSES

## AUSTRIA

Bridgestone Austria GmbH  
Laxenburgerstraße 252  
1232 Vienna - Austria

Tel: +43 1 61 41 32 01  
Fax: +43 1 61 41 31 00

## BENELUX

België/Belgique - G.D. de Luxembourg  
Lierssesteenweg 400, 2800 MECHELEN  
Nederland :  
Distriboulevard 15, 4761 RZ MOERDIJK

Tel: +32 15-281919  
Fax: +32 15-281910  
Tel: +31 168 385 110  
Fax: +31 168 385 111

## CZECH REPUBLIC

Bridgestone Czech Ltd.  
Prague City Center  
Klimentská 46  
110 02 Praha 1 - Czech Republic

Tel: +420-2-2185-6019  
Fax: +420-2-2185-6022

## DENMARK

Bridgestone Danmark A/S.  
Sigma, 1 Søften,  
8382 Hinnerup, Denmark

Tel.: + 45 87 64 66 68  
Fax: +45 87 64 66 66

## FINLAND

Bridgestone Finland  
Korpivaarantie 1  
SF-01450 Vantaa - Finland

Tel: +358 0 85 78 61  
Fax: +358 0 85 78 62 51

## FRANCE

Bridgestone France  
Parc d'activités du Moulin de Massy  
23, rue du Saule Trapu  
91882 Massy cedex - France

Tel: +33 1 69 19 27 00  
Fax: +33 1 69 19 27 01

## GERMANY

Bridgestone Deutschland GmbH  
Du Pont Straße 1  
61352 Bad Homburg v.d.H. - Germany

Tel: +49 61 72 40 801  
Fax: +49 61 72 40 8490

## GREECE

ELASTRAK  
15, Thivaïdos Street, N. Kifissia  
14564 Athens - Greece

Tel: +30-210-819 69 20  
Fax: +30-210-807 78 18

## HUNGARY

Bridgestone Hungary Ltd.  
Timár u. 20  
H-1034 Budapest III - Hungary

Tel: +36 1 387-9229  
+387-9398  
Fax: +36 1 387-9311

## IRELAND

Bridgestone Ireland Limited  
Fingal Bay Business Park Unit 10  
Balbriggan - Co. Dublin - Ireland

Tel: +353 1 841 52 00  
Fax: +353 1 841 52 45

# BRIDGESTONE ADDRESSES

## ITALY

Bridgestone Italia S.p.A.  
 Centro Direzionale Colleoni  
 Palazzo Taurus - Scala 2  
 Viale Colleoni 3  
 20041 Agrate Brianza Milano - Italy

Tel: +39 039 656 01 1  
 Fax: +39 039 68 99 637

## NORWAY

Gjerde & Byhring  
 Jerikoveien 22  
 1067 Oslo - Norway

Tel: +47 22 30 65 77  
 Fax: +47 22 30 60 93

## POLAND

Bridgestone Sales Polska Sp. z.o.o.  
 Domaniewska 41  
 02-672 Warszawa - Poland

Tel.: +48 22 606 18 20  
 Fax: +48 22 606 18 22

## PORTUGAL

Bridgestone Portuguesa, LDA.  
 Urbanização do Passil  
 Lote 96 A Passil  
 2890 - 118 Alcochete - Portugal

Tel.: +351 21 230 7350  
 Fax: +351 21 230 7391

## SPAIN

Bridgestone Hispania  
 C/Fuerteventura 9  
 Polígono Industrial Norte,  
 S. Sebastián de los Reyes  
 28700 Madrid - Spain

Tel.: +34 1 623 30 17  
 Fax: +34 1 623 30 44

## SWEDEN

Bridgestone Sweden AB  
 Gärdevägen 5 A  
 852 52 Sundsvall - Sweden

Tel: +46 60 51 52 00  
 Fax: +46 60 56 61 21

## SWITZERLAND

Bridgestone Schweiz  
 Limmatpark  
 Pfadackerstraße 6  
 8957 Spreitenbach - Switzerland

Tel: +41 56 418 71 11  
 Fax: +41 56 71 34 68

## U.K.

Bridgestone U.K. Ltd.  
 Bridgestone House  
 Athena Drive  
 Tachbrook Park  
 Warwick CV 34 6UX - UK

Tel.: +44 1926 488500  
 Fax: +44 1926 488600

**Bridgestone Europe NV/SA**  
Kleine Kloosterstraat 10 - 1932 Zaventem - Belgium  
Tel.: (32)-2-714 67 00 - Fax: (32)-2-714 68 29

[www.bridgestone.eu](http://www.bridgestone.eu)